


### Overview

#### HPE ProLiant BL460c Gen9 Server Blade

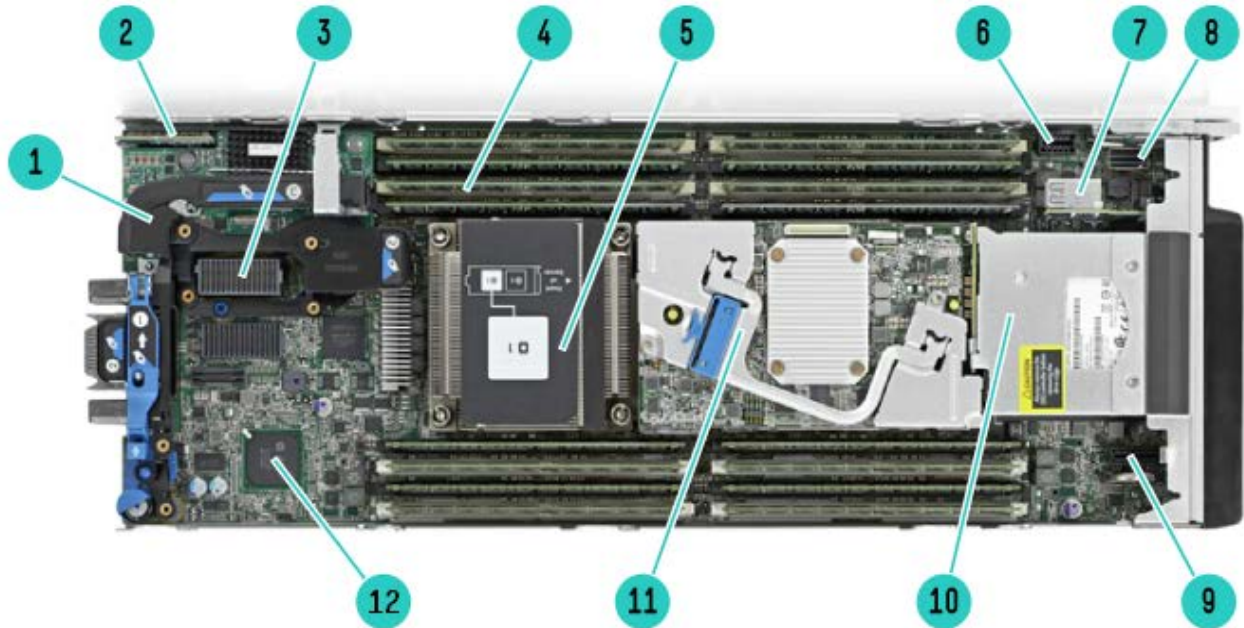

#### HPE ProLiant BL460c Gen9 Server Blade – Internal View

- |                                                                  |                                                     |
|------------------------------------------------------------------|-----------------------------------------------------|
| 1. FlexibleLOM adapter                                           | 7. USB 3.0 and TPM                                  |
| 2. Nand Flash & Micro SD                                         | 8. Embedded SATA Connector                          |
| 3. Mezzanine Slots (x16 PCI 3.0)                                 | 9. Solid State Device Connector                     |
| 4. Sixteen (16) DDR4 DIMM slots (8 per processor)                | 10. Two hot-plug drive bays                         |
| 5. Up to two (2) Intel® Xeon® E5-2600 v3 or v4 family processors | 11. HPE Smart Array P244br Controller with 1GB FBWC |
| 6. HPE BLc 12W Smart Storage Battery connector                   | 12. iLO Management Engine                           |

### What's New

- Some drives have changed

## Standard Features

**NOTE:** This document covers the HPE ProLiant BL460c Gen9 server blade only. For information on HPE BladeSystems c-Class Enclosures and HPE BladeSystem c-Class Interconnect and Mezzanine Components, please see the following:

HPE BladeSystem c-Class Enclosures QuickSpecs:

- HPE BladeSystem c3000 Enclosure QuickSpecs at <https://www.hpe.com/h20195/v2/GetPDF.aspx/c04128340.pdf>  
**NOTE:** The c3000 HPE c-Class enclosures have full backwards and forwards compatibility, existing server blades are supported in the new enclosures and any future server blades will be supported in the existing enclosures.
- HPE BladeSystem c7000 Enclosure QuickSpecs at <https://www.hpe.com/h20195/v2/GetPDF.aspx/c04128339.pdf>  
**NOTE:** The c7000 HPE c-Class enclosures have full backwards and forwards compatibility, existing server blades are supported in the new enclosures and any future server blades will be supported in the existing enclosures.
- HPE BladeSystem c-Class Interconnect and Mezzanine Components at <https://www.hpe.com/us/en/integrated-systems/bladesystem.html#portfolio>  
<https://www.hpe.com/us/en/integrated-systems/bladesystem.html#portfolio>

**NOTE:** For optimal cooling and system performance the BL460c Gen9 Server Blade requires the c7000 enclosure to be configured with 10 fans and the c3000 enclosure to be configured with 6 fans.

**NOTE:** For proper BladeSystem operation, the minimum required versions of HPE Onboard Administrator and HPE Virtual Connect are required and available via the HPE Service Pack for ProLiant, please

see [http://h17007.www1.hpe.com/us/en/enterprise/servers/products/service\\_pack/spp/index.aspx](http://h17007.www1.hpe.com/us/en/enterprise/servers/products/service_pack/spp/index.aspx)

**NOTE:** For the Standard Features shipped in the "Factory Integrated Models", please see the "Configuration Information - Factory Integrated Models" section.

### Processor

One of the following depending on Model

#### E5-2600 v4 series Processors

HPE BL460c Gen9 Intel® Xeon® E5-2690v4 (2.6GHz/14-core/35MB/135W)  
 HPE BL460c Gen9 Intel® Xeon® E5-2683v4 (2.1GHz/16-core/40MB/120W)  
 HPE BL460c Gen9 Intel® Xeon® E5-2680v4 (2.4GHz/14-core/35MB/120W)  
 HPE BL460c Gen9 Intel® Xeon® E5-2660v4 (2.0GHz/14-core/35MB/105W)  
 HPE BL460c Gen9 Intel® Xeon® E5-2650v4 (2.2GHz/12-core/30MB/105W)  
 HPE BL460c Gen9 Intel® Xeon® E5-2650Lv4 (1.7GHz/14-core/35MB/65W)  
 HPE BL460c Gen9 Intel® Xeon® E5-2640v4 (2.4GHz/10-core/25MB/90W)  
 HPE BL460c Gen9 Intel® Xeon® E5-2630v4 (2.2GHz/10-core/20MB/85W)  
 HPE BL460c Gen9 Intel® Xeon® E5-2623v4 (2.6GHz/4-core/10MB/85W)  
 HPE BL460c Gen9 Intel® Xeon® E5-2620v4 (2.1GHz/8-core/20MB/85W)  
 HPE BL460c Gen9 Intel® Xeon® E5-2699v4 (2.2GHz/22-core/55MB/145W)  
 HPE BL460c Gen9 Intel® Xeon® E5-2698v4 (2.2GHz/20-core/50MB/135W)  
 HPE BL460c Gen9 Intel® Xeon® E5-2697v4 (2.3GHz/18-core/45MB/145W)  
 HPE BL460c Gen9 Intel® Xeon® E5-2697Av4 (2.6GHz/16-core/40MB/145W)  
 HPE BL460c Gen9 Intel® Xeon® E5-2695v4 (2.1GHz/18-core/45MB/120W)  
 HPE BL460c Gen9 Intel® Xeon® E5-2667v4 (3.2GHz/8-core/25MB/135W)  
 HPE BL460c Gen9 Intel® Xeon® E5-2643v4 (3.4GHz/6-core/20MB/135W)  
 HPE BL460c Gen9 Intel® Xeon® E5-2637v4 (3.5GHz/4-core/15MB/135W)

**NOTE:** All processors within the server must be identical.

**NOTE:** DIMM slots 4 and 5 are not accessible when the E5-2699 v4, E5-2697 v4, E5-2697A v4, E5-2667 v4, E5-2643 v4, E5-2637 v4, E5-2699 v3, the E5-2697 v3, the E5-2643 v3, the E5-2637 v3, or the E5-2667 v3 is used. In a 2 processor configuration, there are twelve (12) total available DIMM slots.

**NOTE:** For the maximum supported memory speeds for each processor listed above, please reference the 'Memory Speed by Processor Model' table in the Memory section of the QuickSpecs.

## Standard Features

**NOTE:** All processors support Intel® Hyper-Threading and Intel® Turbo Boost Technologies except the E5-2609 v4, E5-2603 v4, E5-2603 v3 and E5-2609 v3.

**NOTE:** DDR4 speed is the maximum memory speed of the processor. Actual memory speed may depend on the quantity and type of DIMMs installed.

**NOTE:** Supports 1 or 2 processors. Mixing different processor models is not supported.

**NOTE:** For the Intel® C610 Chipset E5-2600 v3 and v4 Series, the letter preceding the model number indicates the Product Line (E3, E5, E7); 2600x, 2 = number of CPUs in a Node, 6 is socket/segment designation, 00 = Processor SKU, and x = L for low power SKUs.

**NOTE:** The BL460c Gen9 includes two I/O mezzanine expansion slots. A processor must be installed in processor slot 1 for access to the first mezzanine expansion slot (expansion slot 1). A processor must be installed in processor slot 2 for access to the second mezzanine expansion slot (expansion slot 2).

**NOTE:** The letter "L" following the model number indicates denotes lower wattage.

### Cache Memory

One of the following depending on Model

55MB (1x55MB) L3 cache

**NOTE:** For Twenty two-core processors.

50MB (1x50MB) L3 cache

**NOTE:** For Twenty-core processors.

45MB (1x45MB) L3 cache

**NOTE:** For Eighteen-core processors.

40MB (1x40MB) L3 cache

**NOTE:** For Sixteen-core processors.

35MB (1x35MB) L3 cache

**NOTE:** For Fourteen-core processors.

30MB (1x30MB) L3 cache

**NOTE:** For Twelve-core processors.

25MB (1x25MB) L3 cache

**NOTE:** For Ten or Eight-core processors.

20MB (1x20MB) L3 cache

**NOTE:** For Six, Eight, or Ten-core processors.

15MB (1x15MB) L3 cache

**NOTE:** For Quad or Six-core processors.

10MB (1x10MB) L3 cache

**NOTE:** For Quad-core processors.

### Chipset

Intel® C610 Series Chipset

Intel® E5-2600 v3 or v4 Processor Family

**NOTE:** For more information regarding Intel chipsets, please see the following: <http://www.intel.com/content/www/us/en/chipsets/chipsets-overview.html>

### Upgradeability

Upgradeable to two (2) processors

### On System

#### Management Chipset

HPE iLO (Firmware HPE iLO4 2.0), 4GB NAND with 1GB USB user space configurable via UEFI and accessible via iLO. Read and learn more in the **iLO QuickSpecs**.

**NOTE:** For more information, visit: <https://www.hpe.com/us/en/servers/integrated-lights-out-ilo.html>

## Standard Features

|                          |                                            |
|--------------------------|--------------------------------------------|
| <b>Memory Protection</b> | Advanced ECC                               |
|                          | Memory Mirroring                           |
|                          | Memory Online Spare Mode (Rank Spare Mode) |

|                                                          |                                  |                                                                                                                                                                                                                                              |
|----------------------------------------------------------|----------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Memory</b><br>One of the following depending on Model | Type                             | HPE SmartMemory<br>DDR4 Load Reduced (LRDIMM), or Registered (RDIMM)                                                                                                                                                                         |
|                                                          | Standard (Pre-configured Models) | 256GB (8 x 32GB) DDR4 2400MT/s LDIMMs at 1.2V<br>128GB (4x 32GB) DDR4 2400MT/s LDIMMs at 1.2V<br>64GB (4 x 16GB) DDR4 2400MT/s RDIMMs at 1.2V<br>32GB (2 x 16GB) DDR4 2400MT/s RDIMMs at 1.2V<br>16GB (2 x 8GB) DDR4 2400MT/s RDIMMs at 1.2V |
|                                                          | Maximum (LRDIMM)                 | 2TB (16 x 128GB) up to 2400MT/s at 1.2V                                                                                                                                                                                                      |
|                                                          | Maximum (RDIMM)                  | 512GB (16 x 32GB) up to 2133MT/s at 1.2V                                                                                                                                                                                                     |
|                                                          |                                  |                                                                                                                                                                                                                                              |

**NOTE:** HPE memory from previous generation servers (DDR3) is not compatible with this server. HPE SmartMemory is required to realize the memory performance improvements and enhanced functionality listed in this document for Gen9. For additional information, please see the HPE SmartMemory QuickSpecs at: <https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04111535>

**NOTE:** LRDIMM and RDIMM are distinct memory technologies and cannot be mixed within a server.

**NOTE:** Depending on the memory configuration and processor model, the memory speed may run at 2400MT/s, 2133MT/s, 1866MT/s, or 1600MT/s. Please see the Online Memory Configuration Tool at: <https://memoryconfigurator.hpe.com/DDR4memoryconfig/Home/SelectServer>

|                                                                      |                                                                                                                                                                                                                                          |
|----------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Network Controller</b><br>One of the following depending on Model | One (1) 20Gb 2-port FlexFabric FLB, 10Gb 2-port HPE FlexFabric FLB, or 10Gb 2-port Ethernet FLB                                                                                                                                          |
|                                                                      | <b>NOTE:</b> Supports FCoE, TCP/IP offload engine, hardware-based accelerated iSCSI, iSCSI boot, and autosensing 10Gb/1Gb Ethernet.                                                                                                      |
|                                                                      | <b>NOTE:</b> Each port is autosensing the speed, and can interoperate with 1Gb HPE BladeSystem c-Class interconnect components. Both ports will operate at the same speed.                                                               |
|                                                                      | <b>NOTE:</b> FlexFabric capabilities require the use of an HPE Virtual Connect FlexFabric or Flex10/10D module module.                                                                                                                   |
|                                                                      | Fibre Channel over Ethernet (FCoE) is supported with HPE interconnects. Learn more at: <a href="https://www.hpe.com/us/en/integrated-systems/virtual-connect.html">https://www.hpe.com/us/en/integrated-systems/virtual-connect.html</a> |
|                                                                      | One (1) HPE FlexFabric 10Gb 2-port 536FLB FlexibleLOM                                                                                                                                                                                    |
|                                                                      | One (1) HPE Ethernet 10Gb 2-port 560FLB FlexibleLOM                                                                                                                                                                                      |
|                                                                      | One (1) HPE FlexFabric 20Gb 2-port 650FLB FlexibleLOM                                                                                                                                                                                    |
|                                                                      | <b>NOTE:</b> FlexibleLOMs are not compatible with prior generation c-Class server blades                                                                                                                                                 |
|                                                                      |                                                                                                                                                                                                                                          |
|                                                                      | Standard iLO Network Controller:                                                                                                                                                                                                         |
|                                                                      | One (1) 10/100 Mbps port for the HPE iLO 4 to Onboard Administrator link. The Onboard Administrator (with 10/100/1000 Mbps) to BladeSystem link is 1Gbps                                                                                 |

|                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Expansion Slots</b> | Two (2) I/O expansion mezzanine slots:                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|                        | <ul style="list-style-type: none"> <li>x16 PCIe 3.0 Type A (supports Type A mezzanine cards) (expansion slot 1).<br/><b>NOTE:</b> This expansion slot supports dual-port mezzanine cards: one port is routed to interconnect module bay 3 and the other to bay 4.</li> <li>x16 PCIe 3.0 Type B (supports Type A and Type B mezzanine cards) (expansion slot 2).<br/><b>NOTE:</b> This expansion slot supports dual-port and quad-port mezzanine cards. For dual-port</li> </ul> |
|                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |

## Standard Features

cards, one port is routed to interconnect module bay 5 and the other to bay 6. For quad-port cards, one port is routed to interconnect module bay 5, one to bay 6, one to bay 7, and one to bay 8.

**NOTE:** A second processor must be installed (in processor slot 2) to have access to the second expansion slot (expansion slot 2).

Mezzanine card options include:

- Dual-port 20Gb FlexFabric, Dual-port 10Gb FlexFabric, 10GbE options, and quad-port 1Gb Ethernet server adapter mezzanine options for additional network ports.
- Dual-port 16Gb Fibre Channel HBA for SAN connectivity.
- QDR and FDR InfiniBand for low latency and high bandwidth server interconnectivity.
- I/O accelerator mezzanine options for high transaction rate local storage

---

### HPE Server ROM

HPE ROM (read only memory) is now digitally signed using the HPE Corporate Signing Service. This signature is verified before the flash process starts, reducing accidental programming and preventing malicious efforts to corrupt system ROM.

HPE ROM provides for essential initialization and validation of hardware components before control is passed to the customer-installed operating system. The ROM also provides the capability of booting from various fixed media (HDD, CD-ROM) and removable media (USB), to continue operation to the operating system.

HPE ROM performs very early configuration of the video controller, to allow monitoring of initialization progress via an attached monitor. If configuration or hardware errors are discovered during this early phase of hardware initialization, suitable messages are now displayed on the connected monitor. Additionally, these configuration or hardware errors are logged to the Integrated Management Log (IML) to assist in diagnosis.

The HPE ProLiant ROM is used to configure the following:

- Processor and chipset status registers
- System memory, memory map, and memory initialization
- System hardware configuration (integrated PCI devices and optional PCIe cards).
- Customer-specific BIOS configuration using the HPE ROM-Based Setup Utility (RBSU).

**NOTE:** For further information, please refer to the HPE RBSU (ROM based setup utility) user guide: [https://support.hpe.com/hpsc/doc/public/display?docId=emr\\_na-c00191707&docLocale=en\\_US](https://support.hpe.com/hpsc/doc/public/display?docId=emr_na-c00191707&docLocale=en_US)

---

### HPE Server UEFI /Legacy ROM

Unified Extensible Firmware Interface (UEFI) is an industry standard that provides better manageability and more secured configuration while interacting with your server at boot time. HPE ProLiant Gen9 platform defaults to UEFI and can be factory or field configured for Legacy BIOS Boot Mode.

**NOTE:** The UEFI System Utilities function is analogous to the HPE ROM-Based Setup Utility (RBSU) of legacy BIOS. For more information, please visit <https://www.hpe.com/us/en/product-catalog/detail/pip.6935826.html>

UEFI enables numerous new capabilities specific to HPE ProLiant servers such as:

- Secure Boot
- Operating system specific functionality
- Support for > 2.2 TB (using GPT) boot drives
- USB 3.0 Stack
- Embedded UEFI Shell
- Mass Configuration Deployment Tool using HPE RESTful API
- PXE boot support for IPv6 networks
- Boot support for option cards that only support a UEFI option ROM

## Standard Features

**NOTE:** For UEFI Boot Mode, boot environment and OS image installations should be configured properly to support UEFI.

**NOTE:** HPE UEFI FIO Setting (758959-B22) can be selected to configure the system in Legacy mode in the factory.

|                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                                                                                                                                                                                                                       |  |                                                                                                                                                                                                                                                                                                                                                                                                                                |
|-------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Storage Controller                                                      | All BTO Models                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                       |  | One (1) HPE Smart Array P244br Controller with 1GB Flash-Backed Write Cache (FBWC) supporting RAID 0 and RAID 1, or HPE H244br Smart HBA.<br><b>NOTE:</b> The HPE Smart Array P244br, the HPE H244br Smart HBA, and the HPE B140i (chipset SATA). Support two (2) small form factor (SFF) hot plug drive bays.<br><b>NOTE:</b> For NVMe support, please select the NVMe FIO setting (825555-B21) available on CTO models only. |
| Maximum Internal Storage<br><br>One of the following depending on Model | Hot Plug SFF SAS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 4.0TB                                                                                                                                                                                                                                                 |  | 2 x 2.0TB                                                                                                                                                                                                                                                                                                                                                                                                                      |
|                                                                         | Hot Plug SFF SATA                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 4.0TB                                                                                                                                                                                                                                                 |  | 2 x 2.0TB                                                                                                                                                                                                                                                                                                                                                                                                                      |
|                                                                         | Hot Plug SFF SAS SSD                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 7.68TB                                                                                                                                                                                                                                                |  | 2 x 3.84TB                                                                                                                                                                                                                                                                                                                                                                                                                     |
|                                                                         | Hot Plug SFF SATA SSD                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 7.68TB                                                                                                                                                                                                                                                |  | 2 x 3.84TB                                                                                                                                                                                                                                                                                                                                                                                                                     |
|                                                                         | Hot Plug SFF NVMe SSD                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 4.0TB                                                                                                                                                                                                                                                 |  | 2 x 2.0TB                                                                                                                                                                                                                                                                                                                                                                                                                      |
|                                                                         | <b>NOTE:</b> The ProLiant BL460c Gen9 server includes the HPE hot plug small form factor (SFF) SmartDrive carrier for enhanced management and reduced maintenance errors. HPE drives from previous generation servers (prior to Gen8) are not compatible with the ProLiant BL460c Gen9 drive bays.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                       |  |                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Interfaces                                                              | Micro SDHC Slot<br>USB 3.0 Port                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | One (1) internal Micro Secure Digital High Capacity (Micro SDHC) card slot<br>One (1) internal USB 3.0 connector for USB flash media drive keys<br><b>NOTE:</b> The above options are intended for integrated hypervisor virtualization environments. |  |                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Industry Standard Compliance                                            | ACPI 2.0<br>Microsoft® Logo certifications<br>USB 3.0 Support<br>IPMI 2.0<br>Secure Digital 2.0<br>TPM 1.2 Support<br>IEEE (specific IEEE standards depending on Ethernet adapter card(s) installed)<br>Advanced Encryption Standard (AES)<br>Triple Data Encryption Standard (3DES)<br>SNMP<br>SSL 2.0<br>DMTF Systems Management Architecture for Server Hardware Command Line Protocol (SMASH CLP)<br>Active Directory v1.0<br>PCIe 3.0<br>ASHRAE A3<br>FIPS 140-2 Level-1 certification<br>Energy Star<br><b>NOTE:</b> Energy Star Family level certification covering all BL460c Gen9 E5-2600 v3 configurations that do not include the Intel Xeon E5-2699v3 processor. For more information, visit <a href="https://www.hpe.com/us/en/about/environment/eco-labels.html">https://www.hpe.com/us/en/about/environment/eco-labels.html</a> |                                                                                                                                                                                                                                                       |  |                                                                                                                                                                                                                                                                                                                                                                                                                                |

## Standard Features

|                                                                            |                                            |
|----------------------------------------------------------------------------|--------------------------------------------|
| Operating Systems and Virtualization Software Support for ProLiant Servers | <b>Microsoft Windows Server</b>            |
|                                                                            | <b>Red Hat Enterprise Linux (RHEL)</b>     |
|                                                                            | <b>SUSE Linux Enterprise Server (SLES)</b> |
|                                                                            | <b>Canonical Ubuntu</b>                    |
|                                                                            | <b>Oracle Solaris</b>                      |
|                                                                            | <b>VMware</b>                              |

**NOTE:** For more information on the HPE Certified and Supported ProLiant Servers for OS and Virtualization Software and latest listing of software drivers available for your server, please visit our Support Matrix at: <https://www.hpe.com/us/en/servers/server-operating-systems.html> and our driver download page:

<https://www.hpe.com/us/en/product-catalog/servers/proliant-servers/pip.hpe-proliant-bl460c-gen9-server-balde.7271227.html>

### Enclosures

Hewlett Packard Enterprise offers two different c-Class server blade enclosures to meet your individual needs:

- The HPE BladeSystem c7000 rack enclosure is 10U high and holds up to sixteen (16) ProLiant BL460c Gen9 servers plugged vertically.
- The HPE BladeSystem c3000 rack enclosure is 6U high and holds up to eight (8) HPE ProLiant BL460c Gen9 servers plugged horizontally.

Server blades, interconnect modules, power supplies, fans, and redundant Onboard Administrator modules are all designed to fit into the c3000 and c7000 enclosures.

**NOTE:** For additional enclosure information, please see: <https://www.hpe.com/us/en/integrated-systems/bladeSystem.html#portfolio>

### Graphics

Integrated Matrox G200eh video controller

- 1600 x 1200 (32 bpp)
- 1920 x 1200 (16 bpp)

HPE iLO Management On System Management Memory

- 16 MB Flash Video Memory
- 256 MB DDR 3 with ECC (112 MB after ECC and video)

### Form Factor

HPE ProLiant BL460c Gen9 is a half-height server blade that plugs into the HPE BladeSystem c3000 and c7000 enclosures.

### Embedded Management

#### HPE Integrated Lights Out

Monitor your servers for ongoing management, service alerting, reporting and remote management with iLO. Learn more at <https://www.hpe.com/us/en/servers/integrated-lights-out-ilo.html>

#### UEFI

Configure and boot your servers securely with industry standard Unified Extensible Firmware Interface (UEFI). Learn more at <https://www.hpe.com/us/en/product-catalog/detail/pip.6935826.html>

#### HPE RESTful API

RESTful API is an application programming interface. RESTful Web Service API served by iLO's web server. <https://www.hpe.com/us/en/servers/restful-api.html>

#### Intelligent Provisioning

Provision servers by discovering and deploying 1 to few servers with Intelligent Provisioning. Learn more at <https://www.hpe.com/us/en/product-catalog/detail/pip.5219984.html>

## Standard Features

|                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|-------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Server Utilities</b> | <b>HPE Smart Update</b> Optimize firmware and driver updates with HPE Smart Update solutions. Learn more at <a href="http://h17007.www1.hpe.com/us/en/enterprise/servers/products/service_pack/hpsum/index.aspx">http://h17007.www1.hpe.com/us/en/enterprise/servers/products/service_pack/hpsum/index.aspx</a>                                                                                                                                                                       |
|                         | <b>HPE Systems Insight Manager (HPE SIM)</b> HPE SIM allows you to monitor the health of your HPE ProLiant Servers and HPE Integrity Servers, and also provides you with basic support for non-Hewlett Packard Enterprise servers. HPE SIM also integrates with HPE SUM to provide quick and seamless firmware updates. Learn more at <a href="https://www.hpe.com/us/en/product-catalog/detail/pip.489496.html">https://www.hpe.com/us/en/product-catalog/detail/pip.489496.html</a> |
|                         | <b>Scripting Tool Kit and Windows PowerShell</b> Provision 1 to many servers using your own scripts to discover and deploy them with HPE Scripting Tool Kit for Windows and Linux or HPE Scripting Tools for Windows PowerShell.                                                                                                                                                                                                                                                      |
|                         | <b>HPE RESTful Interface Tool</b> HPE RESTful API tool is a scripting tool to provision servers using RESTful API Interface to discover and deploy servers at scale. Learn more at <a href="https://www.hpe.com/us/en/servers/restful-api.html">https://www.hpe.com/us/en/servers/restful-api.html</a>                                                                                                                                                                                |
|                         | <b>HPE iLO Mobile Application</b> Enables the ability to access, deploy, and manage your server anytime from anywhere from select smartphones and mobile devices. For additional information please visit: <a href="https://www.hpe.com/us/en/servers/integrated-lights-out-ilo.html">https://www.hpe.com/us/en/servers/integrated-lights-out-ilo.html</a>                                                                                                                            |

### Security

- Power-on password
- Administrator's password
- Keyboard password (QuickLock)
- HPE iLO Management On System Management Chipset with:
  - SSL encryption
  - Secure Shell version 2
  - Advanced Encryption Standard (AES) and Triple Data Encryption Standard (3DES) on browser, CLP and XML scripting interface
  - AES and RC4 encryption of video
- External USB port enable/disable
- Network server mode
- Serial interface control
- TPM (Trusted Platform Module) 2.0 option
- Advanced Encryption Standard (AES)
- Intel® Advanced Encryption Standard-New Instructions (AES-NI)
- FIPS 140-2 Level-1 certification

### Availability

#### Memory

- Advanced ECC uses single device data correction (SDDC) to detect and correct single and all multi-bit error that occurs within a single DRAM chip. Both x4 and x8 SDDC are supported (x8 requires lockstep mode).
- Memory online spare mode (also known as rank spare mode) detects a rank that is degrading and switches operation to the spare rank.
- Memory demand and patrol scrubbing to prevent accumulation of correctable errors and reducing the likelihood of unplanned downtime.
- Failed DIMM isolation improves the service time thus improving the overall system availability.
- Address parity protection available on RDIMMs and LRDIMMs detects address bit errors to improve service time and overall system availability.

#### Mezzanine options and I/O



## Standard Features

- Support for one (1) FlexibleLOM, providing two (2) (i.e. redundant) Ethernet ports
- Multiple mezzanine I/O expansion slots that support a wide variety of mezzanine cards each supporting multiple data paths routed to redundant interconnect modules.
- Network Adapter Teaming (bonding) provides network fault tolerance, transmit load balancing, and switch-assisted load balancing.

### Storage

- Two (2) Small Form Factor hot-plug SAS/SATA HDD or SSD or NVMe SSD drive bays.
- Choice of the HPE Smart Array P244br Controller with 1GB FBWC, HPE Smart HBA H244br, or the HP B140i (chipset SATA). RAID 0 and 1 support for all three storage controller offerings.
- Optional dual-port Fibre Channel mezzanine card(s) for redundant SAN connections.

**NOTE:** For NVMe support, please select the NVMe FIO setting (825555-B21) available on CTO models only.

### Processor/Chipset

- Processor internal sensors & thermal control protection against over-temperature conditions.
- Cache parity/ECC protects cache data from accidental data corruption.
- Machine Check Architecture (MCA) detects and captures hardware errors such as system bus, memory ECC, parity, and cache, and improves service time.
- Intel® QPI Protocol Protection allows detection of data errors using a checksum of 8-bits.
- Core Disable for FRB (fault resilient boot) allows a system to power-on despite a failing core-pair. It uses BIST (built-in self-test) results to detect a failure and disables the target core-pair upon subsequent boot.

### Server Blade Enclosure Infrastructure

- Pooled power for true N+N power redundancy through up to six (6) hot-plug, high-efficiency, common slot enclosure-based power supplies (configuration dependent).
- Up to ten (10) enclosure-based hot-plug HPE Active Cool fans that scale to meet future demands, optimize airflow, reduce power draw, and improve acoustic performance.
- Dual grid power providing redundant rack enclosure power feeds to the server blade enclosure.
- HPE Dynamic Power Saver Mode monitors the total enclosure power consumption in real time and automatically adjusts with change in demand for improved efficiency and reliability. HPE Dynamic Power Capping safely limits power usage without impacting performance by capping peak usage instead of average power usage, removes risk to electrical infrastructure with a fast-acting, hardware-based capping algorithm, and reclaims more power by dynamically controlling power limits based on workload demand.
- Up to eight interconnect modules per server blade enclosure providing four simultaneous redundant fabrics for FlexFabric, Virtual Connect Ethernet, Fibre Channel, InfiniBand, Pass Thru Ethernet, etc.
- Enclosure crosslinks between adjacent enclosures to provide interconnect module-to-module connections or as Virtual Connect module stacking links.
- Optional enclosure redundant Onboard Administrator system management module.

---

## Warranty

This product is covered by a global limited warranty and supported by HPE Services and a worldwide network of Hewlett Packard Enterprise Authorized Channel Partners. Hardware diagnostic support and repair is available for three years from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Enhancements to warranty services are available through HPE Pointnext operational services or customized service agreements. Certain restrictions and exclusions apply. Hard drives have either a one year or three year warranty; refer to specific hard drive QuickSpecs for details.

**NOTE:** Server warranty includes 3-year Parts, 3-year Labor, 3-year on-site support. Warranty repairs may be accomplished through the use of Customer Self Repair (CSR) parts. These parts fall into two categories: 1) Mandatory CSR parts are designed for easy replacement. A travel and labor charge will result when customers decline to replace a Mandatory CSR part; 2) Optional CSR parts are also designed

## Standard Features

for easy replacement but may involve added complexity. Customers may choose to have HPE replace Optional CSR parts at no charge. Additional information regarding worldwide limited warranty and technical support is available at <http://h20564.www2.hpe.com/hpsc/wc/public/home>.

## Optional Features

|                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Fibre Channel Support</b> | Up to two (2) optional Fibre Channel mezzanine HBAs are supported on the HPE ProLiant BL460c Gen9.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Compatible SAN</b>        | HPE ProLiant BL460c Gen9 server blades are optimized for HPE MSA, EVA, 3PAR and XP. HPE ProLiant BL460c Gen9 server blades are compatible with select 3rd party SANs. Please see blade storage page for more details at <a href="https://www.hpe.com/us/en/integrated-systems/bladesystem.html">https://www.hpe.com/us/en/integrated-systems/bladesystem.html</a> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>HPE Virtual Connect</b>   | <p>HPE Virtual Connect is an interconnect option for c-Class BladeSystem that simplifies server connectivity to data and storage networks, and reduces costs. Unique HPE Flex-10 technology makes maximum use of network bandwidths, provide dynamic tuning and enable extreme flexibility to meet individual server and infrastructure requirements by allocating up to 4 network connections per server port. Virtual Connect FlexFabric modules extend those capabilities to allocate one function per port to storage connections (FCoE).</p> <p>HPE OneView's software-defined approach to infrastructure management enables central console to administer network connections and workloads for thousands of servers, see <a href="https://www.hpe.com/us/en/integrated-systems/management-software.html">https://www.hpe.com/us/en/integrated-systems/management-software.html</a></p> <p>For more information on Virtual Connect Ethernet, Fibre Channel, Converged Network and management options, see <a href="https://www.hpe.com/us/en/integrated-systems/virtual-connect.html">https://www.hpe.com/us/en/integrated-systems/virtual-connect.html</a></p> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Embedded Management</b>   | <b>iLO Advanced for BladeSystem</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | HPE iLO Advanced for BladeSystem licenses offer smart remote functionality without compromise, for all HPE ProLiant servers. The license includes the full integrated remote console, virtual keyboard, video, and mouse (KVM), multi-user collaboration, console record and replay, and GUI-based and scripted virtual media and virtual folders. You can also activate the enhanced security and power management functionality. Learn more about HPE iLO Advanced at <a href="https://www.hpe.com/us/en/servers/integrated-lights-out-ilo.html">https://www.hpe.com/us/en/servers/integrated-lights-out-ilo.html</a>                                                                                                                                                                                      |
| <b>Server Management</b>     | <b>HPE OneView</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Powerful converged management of servers, storage, and network for IT service automation and infrastructure simplicity.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|                              | <b>HPE Matrix Operating Environment</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | <p>The HPE Matrix Operating Environment (Matrix OE) for ProLiant and Integrity servers is an integrated command center that helps you instantly adjust to dynamic business demands. This advanced infrastructure management software lets you reduce the cost of common data center tasks by up to 40 percent while keeping pace with your changing business. The HPE Matrix OE includes the automated provisioning, optimization, and recovery management capabilities for HPE CloudSystem Matrix, the ideal platform for private cloud and Infrastructure as a Service (IaaS).</p> <p>For more information, visit: <a href="http://h20392.www2.hpe.com/portal/swdepot/displayProductInfo.do?productNumber=HPID">http://h20392.www2.hpe.com/portal/swdepot/displayProductInfo.do?productNumber=HPID</a></p> |
|                              | <b>HPE Insight Cluster Management Utility (CMU)</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | <p>HPE Insight Cluster Management Utility is a Hyperscale management framework that includes software for the centralized provisioning, management and monitoring of nodes and infrastructure.</p> <p>Learn more at <a href="https://www.hpe.com/us/en/product-">https://www.hpe.com/us/en/product-</a></p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |

## Optional Features

[catalog/detail/pip.3296361.html](http://catalog/detail/pip.3296361.html)

|                                  |                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|----------------------------------|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>High Performance Clusters</b> | <b>HPE Cluster Platforms</b> | <p>HPE Cluster Platforms are specifically engineered, factory-integrated large-scale ProLiant clusters optimized for High Performance Computing, with a choice of servers, networks and software. Operating system options include specially priced offerings for Red Hat Enterprise Linux and SUSE Linux Enterprise Server, as well as Microsoft Windows HPC Server. A Cluster Platform Configurator simplifies ordering.</p> <p><a href="https://www.hpe.com/us/en/solutions/hpc-high-performance-computing.html">https://www.hpe.com/us/en/solutions/hpc-high-performance-computing.html</a></p> |
|                                  | <b>HPE HPC Interconnects</b> | <p>High Performance Computing (HPC) interconnect technologies are available for this server as part of the HPE Cluster Platform portfolio. These high-speed InfiniBand and Gigabit interconnects are fully supported by Hewlett Packard Enterprise when integrated within an HPE cluster.</p>                                                                                                                                                                                                                                                                                                       |

### Storage Software

Whether you need to solve a specific data protection, archiving, or storage command and control challenge, or deliver on strategic consolidation, compliance, or continuity initiatives, look no further than HPE storage software. Our storage software helps you reduce costs, simplify storage infrastructure, protect vital assets and respond faster to business opportunities.

Storage software that gets the job done:

- Data Protection and Recovery Software**  
 Whether you're a large enterprise or a smaller business, HPE data protection and recovery software will cost-effectively protect you against disaster and ensure business continuity.
- Data Archive and Migration Software**  
 The HPE storage software enables you to comply with data retention and retrieval requirements, improve application performance, and reduce costs by efficiently migrating infrequently accessed or less valuable data to lower cost storage.
- Storage Resource Management Software (SRM)**  
 The HPE storage resource management software reduces operational costs and provides the command and control foundation you need to efficiently manage and visualize your physical and virtual environments.
- Data Replication Software**  
 Hewlett Packard Enterprise offers array-based and host-based replication software for use in disaster recovery, testing, application development and reporting.
- Storage Device Management Software**  
 Maximize your investment in HPE storage and networking with software that enables hardware-specific configuration, performance tuning and connectivity management.
- HPE StoreVirtual VSA**  
 HPE StoreVirtual VSA allows you to create fully featured shared storage on a VMware vSphere or Microsoft Hyper-V virtualized server. This server model starting November 2013, includes a limited license for HPE StoreVirtual VSA software with 1TB of capacity. To download the license key and StoreVirtual VSA software, visit: <https://www.hpe.com/us/en/product-catalog/storage/storage-software.hits-12.html>

**NOTE:** You will need your server serial number in order to complete the registration form. Fully functional, capacity-based licenses are available in 4TB, 10T and 50TB sizes.

**NOTE:** For more information available Storage Software including QuickSpecs, please see: <http://www.hpe.com/storage>

### HPE Insight Online

HPE Insight Online is part of the HPE Support Center for one stop, secure access to product and HPE support information personalized to your IT environment. Insight Online can automatically display devices remotely monitored by HPE Remote Support tools. With Insight Online's easy navigation you can efficiently

## Optional Features

track your IT support contracts and device status from anywhere and at anytime. <https://h20392.www2.hpe.com/portal/swdepot/displayProductInfo.do?productNumber=RSSWMBASE>

---

### Get connected to HPE

To get the most from your investment in Hewlett Packard Enterprise servers, get connected to Hewlett Packard Enterprise using our innovative remote support technology which provides system health monitoring, pre-failure alert notification and more.

---

### Expansion Blade Support

Supports one (1) optional D2220sb storage or PCI expansion blade

**NOTE:** Expansion blade support requires the use of either the HPE Dynamic Smart Array B140i or the HPE Smart Array P246br controller.

**NOTE:** Expansion blade support requires server firmware versions from SPP 2015.04 or later.

---

### Factory Express Portfolio for Servers and Storage

HPE Factory Express offers configuration, customization, integration and deployment services for Hewlett Packard Enterprise servers and storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed.

Factory Express offers service packages for simple configuration, racking, installation, complex configuration and design services as well as individual factory services, such as image loading, asset tagging, and custom packaging. Hewlett Packard Enterprise products supported through Factory Express include a wide array of servers and storage: HPE Integrity, HPE ProLiant, HPE ProLiant Server Blades, HPE BladeSystem, HPE 9000 servers as well as the MSAxxxx, VA7xxx, EVA, XP, rackable tape libraries and configurable network switches.

For more information on Factory Express services on your specific server model please contact your sales representative or go to: <https://www.hpe.com/us/en/services/factory-express.html>

---

### HPE Simple Configurator

SCE is a guided self-service tool to help sales and non-technical people provide customers with initial configurations in 3 to 5 minutes. You may then send the configuration on for configuration help, or use in your existing ordering processes. If you require "custom" rack configuration or configuration for products not available in SCE, please contact the HPE Customer Business Center or an Authorized Partner for assistance. <https://h22174.www2.hpe.com/SimplifiedConfig/Welcome>

## Recommended Support Services for BL460

|                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|-----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Service and Support</b>              | <p><b>Protect your business beyond warranty with HPE Support Services</b></p> <p>HPE Technology Services delivers confidence, reduces risk and helps customers realize agility and stability. Connect to Hewlett Packard Enterprise to help prevent problems and solve issues faster HPE Support Services enable you to choose the right service level, length of coverage and response time as you purchase your new server, giving you full entitlement for the support for need for your IT and business.</p> <p><b>Connect your devices</b></p> <p>Unlock all of the benefits of your technology investment by connecting your products to HP Enterprise. Achieve up to 77%<sup>1</sup> reduction in down time, near 100%<sup>2</sup> diagnostic accuracy and a single consolidated view of your environment. By connecting, you will receive 24x7 monitoring, pre-failure alerts, automatic call logging, and automatic parts dispatch. HPE Proactive Care Service and HPE Datacenter Care Service customers will also benefit from proactive activities to help prevent issues and increase optimization. All of these benefits are already available to you with your server storage and networking products, securely connected to Hewlett Packard Enterprise support.</p> <p>1 – IDC<br/>2 – HP CSC reports 2014 - 2015</p> |
| <b>Optimized Support recommendation</b> | <p><b>HPE Proactive Care Advanced</b> - 24x7 coverage, three year Support Service</p> <p>This services helps achieve a higher return on your product investment with personalized support from a local assigned Account Support Manager who will share best practice advice and personalized recommendations designed to help improve availability and performance to increase stability and reduce unplanned downtime. Leverage your system's ability to connect to Hewlett Packard Enterprise for pre-failure alerts, automatic call logging and parts dispatch. For business critical incidents, this service offers critical event management to reduce mean time to resolution. This recommendation provides 24x7 coverage with four-hour response for hardware and collaborative support that offers two-hour callback for supported software issues. Collaborative software management is included with independent software vendors unless you have your software support from Hewlett Packard Enterprise where we own all cases from start through to resolution.</p> <p><a href="https://www.hpe.com/h20195/V2/GetDocument.aspx?docname=4AA5-3259ENW&amp;cc=us&amp;lc=en">https://www.hpe.com/h20195/V2/GetDocument.aspx?docname=4AA5-3259ENW&amp;cc=us&amp;lc=en</a></p>                                                  |
| <b>Standard Support recommendation</b>  | <p><b>HPE Proactive Care - 24x7 coverage, three year Support Service</b></p> <p>HPE Proactive Care gives customers an enhanced call experience plus helps preventing problems and maintains IT stability by utilizing personalized proactive reports with recommendations and advice when your products are connected to Hewlett Packard Enterprise. This Service combines three years' proactive reporting and advice with our 24x7 coverage, four hour hardware response time when there is a problem. In addition, this service includes collaborative software support for Independent Software Vendors (ISVs), (Red Hat, VMWare, Microsoft, etc) running on your HPE servers.</p> <p><a href="https://www.hpe.com/h20195/v2/GetPDF.aspx/4AA3-8855ENW.pdf">https://www.hpe.com/h20195/v2/GetPDF.aspx/4AA3-8855ENW.pdf</a></p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|                                         | <p><b>Parts and Materials</b></p> <p>Hewlett Packard Enterprise will provide HPE-supported replacement parts and materials necessary to maintain the covered hardware product in operating condition, including parts and materials for available and recommended engineering improvements.</p> <p>Parts and components that have reached their maximum supported lifetime and/or the maximum usage limitations as set forth in the manufacturer's operating manual, product quick-specs, or the technical product data sheet will not be provided, repaired, or replaced as part of these services.</p> <p>The defective media retention service feature option applies only to Disk or eligible SSD/Flash Drives replaced by Hewlett Packard Enterprise due to malfunction.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |

## Recommended Support Services for BL460

### Related Services

#### **HPE Server Hardware Installation**

Provides for the basic hardware installation of HPE branded servers, storage devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner.

<https://www.hpe.com/h20195/V2/GetPDF.aspx/5981-9356EN.pdf>

#### **Data Center Care Services**

HPE Datacenter Care helps improve IT stability and security, increase the value of IT, and enable agility and innovation. It is a structured framework of repeatable, tested, and globally available services “building blocks.” You can deploy, operate, and evolve your datacenter wherever you are on your IT journey. With HPE Datacenter Care, you benefit from a personalized relationship with Hewlett Packard Enterprise via a single point of accountability for HPE and others’ products. For more information,

visit <https://www.hpe.com/us/en/services/datacenter-hybrid-services.html>

#### **Data Privacy Services**

Protect your data through better media management. HPE Data privacy services help manage and protect sensitive data to reduce the risk of unauthorized access to private information and help meet compliance requirements. Our retention services allow you to keep drives and other devices upon failure with Defective Media Retention and Comprehensive Defective Material Retention, our removal services provide convenient data sanitization and our recovery services allow you to safely retire IT assets and capture any remaining value from the hardware.

<https://www.hpe.com/us/en/services/platform-consulting-services.html>

#### **HPE Education Services**

Keep your IT staff trained making sure they have the right skills to deliver on your business outcomes. Book on a class today and learn how to get the most from your technology investment.

For more information: <http://www.hpe.com/services>

## Models

**NOTE:** For the Standard Features shipped in the "Factory Integrated Models", please see the "Configuration Information - Factory Integrated Models" section.

**NOTE:** Pre-configured models ship with the configurations below. Options can be selected from the Core or Additional options section of this QuickSpecs.

**NOTE:** Hewlett Packard Enterprise does not allow factory integration of options into pre-configured models. Any additional options purchased will be shipped separately.

**NOTE:** If you desire a custom configuration please see "Configuration Information - Factory Integrated Models" section of this QuickSpecs.

**NOTE:** All Pre-configured Models come populated with some hard drive blanks installed.

### E5-2600 v4 series Processors

|                                                                          |                           |                                                                                                                                                                           |
|--------------------------------------------------------------------------|---------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>HPE ProLiant BL460c Gen9 E5-2620v4 1P 16GB-R Server</b><br>813193-B21 | <b>Processor(s)</b>       | (1) Intel® Xeon® E5-2620 v4 (2.1GHz/8-core/20MB/8GT-s QPI/85W, DDR4-2133)                                                                                                 |
|                                                                          | <b>Cache Memory</b>       | 20MB (1x20MB) Level 3 cache                                                                                                                                               |
|                                                                          | <b>Memory</b>             | 16GB (2x 8GB) 2400MT/s (DDR4-2400) Registered DIMMs at 1.2V)<br><b>NOTE: Total of 16 DIMM slots. Only eight (8) usable with single processor.</b>                         |
|                                                                          | <b>Network Controller</b> | HPE FlexFabric 10Gb 2-port 536FLB FlexibleLOM                                                                                                                             |
|                                                                          | <b>Storage Controller</b> | HPE Smart HBA H244br Controller with RAID 0,1                                                                                                                             |
|                                                                          | <b>Hard Drive</b>         | None ship standard<br>Supports up to two (2) HPE hot-plug SFF SAS/SATA/SDD drives<br><b>NOTE: NVMe SSDs not available on this model.</b>                                  |
|                                                                          | <b>Internal Storage</b>   | SAS: 2.0TB; SATA: 2.0TB; SAS SSD: 3.84TB; SATA SSD: 3.84TB                                                                                                                |
|                                                                          | <b>Optical Drive Bay</b>  | None                                                                                                                                                                      |
|                                                                          | <b>Expansion Slots</b>    | 2 standard - Slot 1 supports Type A mezzanine Cards. Slot 2 supports Type A and Type B mezzanine cards.                                                                   |
|                                                                          | <b>Management</b>         | HPE iLO Management (standard)<br>Optional: HPE OneView or HPE Insight Control                                                                                             |
|                                                                          | <b>Form Factor</b>        | Up to eight (8) half-height blades supported in the HPE BladeSystem c3000 Enclosure<br>Up to sixteen (16) half-height blades supported in HPE BladeSystem c7000 Enclosure |
|                                                                          | <b>Warranty</b>           | Server warranty includes 3-year Parts, 3-year Labor, 3-year on-site support.                                                                                              |

|                                                                          |                           |                                                                                                                                          |
|--------------------------------------------------------------------------|---------------------------|------------------------------------------------------------------------------------------------------------------------------------------|
| <b>HPE ProLiant BL460c Gen9 E5-2640v4 1P 32GB-R Server</b><br>813194-B21 | <b>Processor(s)</b>       | (1) Intel® Xeon® E5-2640 v4 (2.4GHz/10-core/25MB/8GT-s QPI/90W, DDR4-2133)                                                               |
|                                                                          | <b>Cache Memory</b>       | 25MB (1x25MB) Level 3 cache                                                                                                              |
|                                                                          | <b>Memory</b>             | 32GB (2x 16GB) 2400MT/s (DDR4-2400) Registered DIMMs at 1.2V)<br><b>NOTE: Total of 16 DIMM slots.</b>                                    |
|                                                                          | <b>Network Controller</b> | HPE FlexFabric 10Gb 2-port 536FLB FlexibleLOM                                                                                            |
|                                                                          | <b>Storage Controller</b> | HPE Smart Array P244br Controller with RAID 0,1                                                                                          |
|                                                                          | <b>Hard Drive</b>         | None ship standard<br>Supports up to two (2) HPE hot-plug SFF SAS/SATA/SDD drives<br><b>NOTE: NVMe SSDs not available on this model.</b> |
|                                                                          | <b>Internal Storage</b>   | SAS: 2.0TB; SATA: 2.0TB; SAS SSD: 3.84TB; SATA SSD: 3.84TB                                                                               |
|                                                                          | <b>Optical Drive Bay</b>  | None                                                                                                                                     |



## Models

|                                                                           |                           |                                                                                                                                                                           |
|---------------------------------------------------------------------------|---------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                           | <b>Expansion Slots</b>    | 2 standard - Slot 1 supports Type A mezzanine Cards. Slot 2 supports Type A and Type B mezzanine cards.                                                                   |
|                                                                           | <b>Management</b>         | HPE iLO Management (standard)<br>Optional: HPE OneView or HPE Insight Control                                                                                             |
|                                                                           | <b>Form Factor</b>        | Up to eight (8) half-height blades supported in the HPE BladeSystem c3000 Enclosure<br>Up to sixteen (16) half-height blades supported in HPE BladeSystem c7000 Enclosure |
|                                                                           | <b>Warranty</b>           | Server warranty includes 3-year Parts, 3-year Labor, 3-year on-site support.                                                                                              |
| <b>HPE ProLiant BL460c Gen9 E5-2650v4 2P 64GB-R Server</b><br>813195-B21  | <b>Processor(s)</b>       | (2) Intel® Xeon® E5-2650 v4 (2.2GHz/12-core/30MB/9.6GT-s QPI/90W, DDR4-2400)                                                                                              |
|                                                                           | <b>Cache Memory</b>       | 30MB (1x30MB) Level 3 cache                                                                                                                                               |
|                                                                           | <b>Memory</b>             | 64GB (4x 16GB) 2400MT/s (DDR4-2400) Registered DIMMs at 1.2V<br><b>NOTE: Total of 16 DIMM slots.</b>                                                                      |
|                                                                           | <b>Network Controller</b> | HPE FlexFabric 10Gb 2-port 536FLB FlexibleLOM                                                                                                                             |
|                                                                           | <b>Storage Controller</b> | HPE Smart Array P244br Controller with RAID 0,1                                                                                                                           |
|                                                                           | <b>Hard Drive</b>         | None ship standard<br>Supports up to two (2) HPE hot-plug SFF SAS/SATA/SDD drives<br><b>NOTE: NVMe SSDs not available on this model.</b>                                  |
|                                                                           | <b>Internal Storage</b>   | SAS: 2.0TB; SATA: 2.0TB; SAS SSD: 3.84TB; SATA SSD: 3.84TB                                                                                                                |
|                                                                           | <b>Optical Drive Bay</b>  | None                                                                                                                                                                      |
|                                                                           | <b>Expansion Slots</b>    | 2 standard - Slot 1 supports Type A mezzanine Cards. Slot 2 supports Type A and Type B mezzanine cards.                                                                   |
|                                                                           | <b>Management</b>         | HPE iLO Management (standard)<br>Optional: HPE OneView or HPE Insight Control                                                                                             |
|                                                                           | <b>Form Factor</b>        | Up to eight (8) half-height blades supported in the HPE BladeSystem c3000 Enclosure<br>Up to sixteen (16) half-height blades supported in HPE BladeSystem c7000 Enclosure |
|                                                                           | <b>Warranty</b>           | Server warranty includes 3-year Parts, 3-year Labor, 3-year on-site support.                                                                                              |
| <b>HPE ProLiant BL460c Gen9 E5-2660v4 2P 128GB-R Server</b><br>813196-B21 | <b>Processor(s)</b>       | (2) Intel® Xeon® E5-2660 v4 (2.0GHz/14-core/35MB/9.6GT-s QPI/105W, DDR4-2400)                                                                                             |
|                                                                           | <b>Cache Memory</b>       | 35MB (1x35MB) Level 3 cache                                                                                                                                               |
|                                                                           | <b>Memory</b>             | 128GB (4x 32GB) 2400MT/s (DDR4-2400) Registered DIMMs at 1.2V<br><b>NOTE: Total of 16 DIMM slots.</b>                                                                     |
|                                                                           | <b>Network Controller</b> | HPE FlexFabric 20Gb 2-port 650FLB FlexibleLOM                                                                                                                             |
|                                                                           | <b>Storage Controller</b> | HPE Smart Array P244br Controller with RAID 0,1                                                                                                                           |
|                                                                           | <b>Hard Drive</b>         | None ship standard<br>Supports up to two (2) HPE hot-plug SFF SAS/SATA/SDD drives<br><b>NOTE: NVMe SSDs not available on this model.</b>                                  |
|                                                                           | <b>Internal Storage</b>   | SAS: 2.0TB; SATA: 2.0TB; SAS SSD: 3.84TB; SATA SSD: 3.84TB                                                                                                                |
|                                                                           | <b>Optical Drive Bay</b>  | None                                                                                                                                                                      |
|                                                                           | <b>Expansion Slots</b>    | 2 standard - Slot 1 supports Type A mezzanine Cards. Slot 2 supports Type A and Type B mezzanine cards.                                                                   |
|                                                                           | <b>Management</b>         | HPE iLO Management (standard)                                                                                                                                             |

## Models

|                                                                               |                           |                                                                                                                                                                                                                           |
|-------------------------------------------------------------------------------|---------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                               | <b>Form Factor</b>        | Optional: HPE OneView or HPE Insight Control<br>Up to eight (8) half-height blades supported in the HPE BladeSystem c3000 Enclosure<br>Up to sixteen (16) half-height blades supported in HPE BladeSystem c7000 Enclosure |
|                                                                               | <b>Warranty</b>           | Server warranty includes 3-year Parts, 3-year Labor, 3-year on-site support.                                                                                                                                              |
| <b>HPE ProLiant BL460c Gen9 E5-2680v4 2P 256GB-R Server</b><br><br>813197-B21 | <b>Processor(s)</b>       | (2) Intel® Xeon® E5-2680 v4 (2.4GHz/14-core/35MB/9.6GT-s QPI/120W, DDR4-2400)                                                                                                                                             |
|                                                                               | <b>Cache Memory</b>       | 35MB (1x35MB) Level 3 cache                                                                                                                                                                                               |
|                                                                               | <b>Memory</b>             | 256GB (8x 32GB) 2400MT/s (DDR4-2400) Registered DIMMs at 1.2V)<br><b>NOTE: Total of 16 DIMM slots.</b>                                                                                                                    |
|                                                                               | <b>Network Controller</b> | HPE FlexFabric 20Gb 2-port 650FLB FlexibleLOM                                                                                                                                                                             |
|                                                                               | <b>Storage Controller</b> | HPE Smart Array P244br Controller with RAID 0,1                                                                                                                                                                           |
|                                                                               | <b>Hard Drive</b>         | None ship standard<br>Supports up to two (2) HPE hot-plug SFF SAS/SATA/SDD drives<br><b>NOTE: NVMe SSDs not available on this model.</b>                                                                                  |
|                                                                               | <b>Internal Storage</b>   | SAS: 2.0TB; SATA: 2.0TB; SAS SSD: 3.84TB; SATA SSD: 3.84TB                                                                                                                                                                |
|                                                                               | <b>Optical Drive Bay</b>  | None                                                                                                                                                                                                                      |
|                                                                               | <b>Expansion Slots</b>    | 2 standard - Slot 1 supports Type A mezzanine Cards. Slot 2 supports Type A and Type B mezzanine cards.                                                                                                                   |
|                                                                               | <b>Management</b>         | HPE iLO Management (standard)<br>Optional: HPE OneView or HPE Insight Control                                                                                                                                             |
|                                                                               | <b>Form Factor</b>        | Up to eight (8) half-height blades supported in the HPE BladeSystem c3000 Enclosure<br>Up to sixteen (16) half-height blades supported in HPE BladeSystem c7000 Enclosure                                                 |
|                                                                               | <b>Warranty</b>           | Server warranty includes 3-year Parts, 3-year Labor, 3-year on-site support.                                                                                                                                              |

## Configuration Information - Factory Integrated Models

**NOTE:** This section lists some of the steps required to configure a Factory Integrated Model (configure-to-order or CTO server). To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an Hewlett Packard Enterprise approved configurator. Contact your local sales representative for information on CTO product offerings and requirements.

**NOTE:** Configure-to-order server blades must start with a CTO Blade Server.

**NOTE:** FIO indicates that this option is only available as a factory installable option.

**NOTE:** All Factory Integrated Models will be populated with sufficient hard drive blanks based on the number of initial hard drives ordered with the server.

### Step 1: Base Server Blade Configuration (Select a configurable Blade)

|               |                                                                                                                   |            |
|---------------|-------------------------------------------------------------------------------------------------------------------|------------|
| <b>Models</b> | HPE ProLiant BL460c Gen9 E5-v4 10Gb/20Gb FlexibleLOM Configure-to-order Blade Server                              | 813198-B21 |
|               | <b>Configurable Models ship with:</b>                                                                             |            |
|               | One (1) FlexibleLOM connector providing a choice for one (1) of the supported 10Gb/20Gb FlexibleLOMs (see Step 2) |            |
|               | Two (2) HPE small form factor hot-plug SAS/SATA/ HDD or SSD hard drive bays                                       |            |
|               | Two (2) x16 PCIe I/O expansion slots (one Type A, one Type A/B)                                                   |            |
|               | One (1) integrated USB connector and one (1) MicroSDHC connector                                                  |            |
|               | One (1) TPM connector                                                                                             |            |
|               | HPE iLO Management (standard)                                                                                     |            |

### Step 2: Choose Required Options (one of the following from each list unless otherwise noted)

|                       |                                                                                                                |            |
|-----------------------|----------------------------------------------------------------------------------------------------------------|------------|
| <b>HPE Processors</b> | <b>NOTE:</b> All configure-to-order processor kits (i.e. xxxxxx-L21) contain one (1) processor.                |            |
|                       | <b>NOTE:</b> If two processors are desired, select one xxxxxx-L21 here in Step 2 and one xxxxxx-B21 in Step 4. |            |
|                       | <b>E5-2600 v4 series Processors</b>                                                                            |            |
|                       | HPE BL460c Gen9 Intel Xeon E5-2690v4 (2.6GHz/14-core/35MB/135W) FIO Processor Kit                              | 819852-L21 |
|                       | HPE BL460c Gen9 Intel Xeon E5-2683v4 (2.1GHz/16-core/40MB/120W) FIO Processor Kit                              | 819851-L21 |
|                       | HPE BL460c Gen9 Intel Xeon E5-2680v4 (2.4GHz/14-core/35MB/120W) FIO Processor Kit                              | 819842-L21 |
|                       | HPE BL460c Gen9 Intel Xeon E5-2660v4 (2.0GHz/14-core/35MB/105W) FIO Processor Kit                              | 819841-L21 |
|                       | HPE BL460c Gen9 Intel Xeon E5-2650v4 (2.2GHz/12-core/30MB/105W) FIO Processor Kit                              | 819840-L21 |
|                       | HPE BL460c Gen9 Intel Xeon E5-2650Lv4 (1.7GHz/14-core/35MB/65W) FIO Processor Kit                              | 819849-L21 |
|                       | HPE BL460c Gen9 Intel Xeon E5-2640v4 (2.4GHz/10-core/25MB/90W) FIO Processor Kit                               | 819839-L21 |
|                       | HPE BL460c Gen9 Intel Xeon E5-2630v4 (2.2GHz/10-core/25MB/85W) FIO Processor Kit                               | 819845-L21 |
|                       | HPE BL460c Gen9 Intel Xeon E5-2623v4 (2.6GHz/4-core/10MB/85W) FIO Processor Kit                                | 819844-L21 |
|                       | HPE BL460c Gen9 Intel Xeon E5-2620v4 (2.1GHz/8-core/20MB/85W) FIO Processor Kit                                | 819838-L21 |
|                       | HPE BL460c Gen9 Intel Xeon E5-2699v4 (2.2GHz/22-core/55MB/145W) FIO Processor Kit                              | 819856-L21 |
|                       | HPE BL460c Gen9 Intel Xeon E5-2698v4 (2.2GHz/20-core/50MB/135W) FIO Processor Kit                              | 819855-L21 |
|                       | HPE BL460c Gen9 Intel Xeon E5-2697v4 (2.3GHz/18-core/45MB/145W) FIO Processor Kit                              | 819854-L21 |
|                       | HPE BL460c Gen9 Intel Xeon E5-2697Av4 (2.6GHz/16-core/40MB/145W) FIO Processor Kit                             | 819857-L21 |
|                       | HPE BL460c Gen9 Intel Xeon E5-2695v4 (2.1GHz/18-core/45MB/120W) FIO Processor Kit                              | 819853-L21 |
|                       | HPE BL460c Gen9 Intel Xeon E5-2667v4 (3.2GHz/8-core/25MB/135W) FIO Processor Kit                               | 819850-L21 |
|                       | HPE BL460c Gen9 Intel Xeon E5-2643v4 (3.4GHz/6-core/20MB/135W) FIO Processor Kit                               | 819848-L21 |
|                       | HPE BL460c Gen9 Intel Xeon E5-2637v4 (3.5GHz/4-core/15MB/135W) FIO Processor Kit                               | 819847-L21 |

## Configuration Information - Factory Integrated Models

**NOTE:** All processors within the server must be identical.

**NOTE:** DIMM slots 4 and 5 are not accessible when the E5-2699 v4, E5-2697 v4, E5-2697A v4, E5-2667 v4, E5-2643 v4, E5-2637 v4, E5-2699 v3, the E5-2697 v3, the E5-2643 v3, the E5-2637 v3, or the E5-2667 v3 is used. In a 2 processor configuration, there are twelve (12) total available DIMM slots.

**NOTE:** For the maximum supported memory speeds for each processor listed above, please reference the 'Memory Speed by Processor Model' table in the Memory section of the QuickSpecs.

**NOTE:** All processors support Intel® Hyper-Threading and Intel® Turbo Boost Technologies except the E5-2609 v4, E5-2603 v4, E5-2603 v3 and E5-2609 v3.

**NOTE:** DDR4 speed is the maximum memory speed of the processor. Actual memory speed may depend on the quantity and type of DIMMs installed.

**NOTE:** Supports 1 or 2 processors. Mixing different processor models is not supported.

**NOTE:** For the Intel® C610 Chipset E5-2600 v3 and v4 Series, the letter preceding the model number indicates the Product Line (E3, E5, E7); 2600x, 2 = number of CPUs in a Node, 6 is socket/segment designation, 00 = Processor SKU, and x = L for low power SKUs.

**NOTE:** The BL460c Gen9 includes two I/O mezzanine expansion slots. A processor must be installed in processor slot 1 for access to the first mezzanine expansion slot (expansion slot 1). A processor must be installed in processor slot 2 for access to the second mezzanine expansion slot (expansion slot 2).

**NOTE:** The letter "L" following the model number indicates denotes lower wattage.

### HPE Memory

**NOTE:** HPE memory from previous generation servers (DDR3) is not compatible with this server. HPE SmartMemory is required to realize the memory performance improvements and enhanced functionality listed in this document for Gen9. For additional information, please see the HPE SmartMemory QuickSpecs at:

<https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04111535>

**NOTE:** LRDIMM and RDIMM are distinct memory technologies and cannot be mixed within a server.

**NOTE:** 128GB DIMMs cannot be mixed with other DIMM capacities within the server

**NOTE:** Depending on the memory configuration and processor model, the memory speed may run at 2400MT/s, 2133MT/s, 1866MT/s, or 1600MT/s. Please see the Online Memory Configuration Tool at:

<https://memoryconfigurator.hpe.com/DDR4memoryconfig/Home/Legal>

### HPE SmartMemory

#### Registered DIMMs (RDIMMs) - E5-2600 v4 series Processors

|                                                                               |            |
|-------------------------------------------------------------------------------|------------|
| HPE 8GB (1x8GB) Single Rank x8 DDR4-2400 CAS-17-17-17 Registered Memory Kit   | 805347-B21 |
| HPE 16GB (1x16GB) Single Rank x4 DDR4-2400 CAS-17-17-17 Registered Memory Kit | 805349-B21 |
| HPE 16GB (1x16GB) Dual Rank x4 DDR4-2400 CAS-17-17-17 Registered Memory Kit   | 836220-B21 |
| HPE 16GB (2x8GB) Dual Rank x8 DDR4-2400 CAS-17-17-17 Registered Memory Kit    | P00423-B21 |
| HPE 32GB (1x32GB) Dual Rank x4 DDR4-2400 CAS-17-17-17 Registered Memory Kit   | 805351-B21 |

#### Load Reduced DIMMs (LRDIMMs) - E5-2600 v4 series Processors

|                                                                                  |            |
|----------------------------------------------------------------------------------|------------|
| HPE 32GB (1x32GB) Dual Rank x4 DDR4-2400 CAS-17-17-17 Load Reduced Memory Kit    | 805353-B21 |
| HPE 64GB (1x64GB) Quad Rank x4 DDR4-2400 CAS-17-17-17 Load Reduced Memory Kit    | 805358-B21 |
| HPE 128GB (1x128GB) Octal Rank x4 DDR4-2400 CAS-20-18-18 Load Reduced Memory Kit | 809208-B21 |

**NOTE:** For more information on ProLiant Energy Efficient Features, see:

<https://www.hpe.com/us/en/about/environment/eco-labels.html>

## Configuration Information - Factory Integrated Models

**NOTE:** The server requires one (1) FlexibleLOM that is installed in the FlexibleLOM connectors. All FlexibleLOMs are dual port: One port is routed to interconnect module bay 1 and the other to bay 2.

### 20Gb FlexibleLOM Adapters

|                                           |            |
|-------------------------------------------|------------|
| HPE FlexFabric 20Gb 2-port 630FLB Adapter | 700065-B21 |
| HPE FlexFabric 20Gb 2-port 650FLB Adapter | 700763-B21 |

### 10Gb FlexibleLOM Adapters

|                                             |            |
|---------------------------------------------|------------|
| HPE FlexFabric 10Gb 2-port 536FLB Adapter   | 766490-B21 |
| HPE Ethernet 10Gb 2-port 560FLB FIO Adapter | 655639-B21 |

**NOTE:** Please see the QuickSpecs for Technical Specifications and additional information.

## Step 3: Choose Additional Factory Integration Options

|                                                     |                                                                                               |            |
|-----------------------------------------------------|-----------------------------------------------------------------------------------------------|------------|
| <b>HPE Insight Software</b>                         | HPE Insight Control including 1yr 24x7 Support ProLiant ML/DL/BL-bundle Single Server FIO LTU | C6N36A     |
| <b>Converged Infrastructure Management Software</b> | <b>HPE OneView - Server hardware required on same purchase order</b>                          |            |
|                                                     | HPE OneView for Blade Server including 3yr 24x7 Support FIO Bundle Physical 1-server LTU      | F6Q89A     |
|                                                     | HPE OneView w/o iLO including 3yr 24x7 Support 1-server FIO LTU                               | P8B31A     |
| <b>HPE Storage Controllers</b>                      | HPE Smart Array P244br/1GB FBWC 12Gb 2-ports Int FIO SAS Controller                           | 761871-B21 |
|                                                     | HPE Smart Array P246br/1GB FBWC 12Gb 4-ports Int FIO SAS Controller                           | 749975-B21 |
|                                                     | HPE H244br 12Gb 2-ports Int FIO Smart Host Bus Adapter                                        | 761878-B21 |
|                                                     | HPE Gen9 Broadwell NVMe FIO Setting                                                           | 825555-B21 |
|                                                     | HP FIO Enable Smart Array B140i Setting                                                       | 784308-B21 |

**NOTE:** The HPE Gen9 Broadwell NVMe FIO Setting (825555-B21) is required to support SFF NVMe SSDs within the system. This option is not compatible with the HPE Smart Array P244br, HPE Smart Array P246br, or HPE Smart HBA H244br. Hewlett Packard Enterprise recommends the use of a dual M.2 solid state drive kit for boot when using this option.

**NOTE:** The HPE Smart Array B140i Controller (chipset SATA) comes standard with the HPE BL460c Gen9 10Gb/20Gb FLB CTO Blade (727021-B21). If neither the HPE Smart Array P244br nor the HPE H244br controllers are chosen, a SATA cable will be provided to support SATA devices for the two internal drives. If RAID is required when using the B140i, please choose 'HPE FIO B140i RAID Enable Kit - BIOS Setting' (784308-B21).

**NOTE:** The HPE Smart Array P246br controller is only required when using a PCI expansion blade or D2220sb storage blade with the BL460c Gen9.

## Step 4: Choose Additional Options for Factory Integration

**NOTE:** For additional options, please refer to the "Core Options" and "Additional Options" section below. For additional options, including server blade enclosures interconnect, mezzanine options and power subsystem options; please see the Core Options and Additional sections below; or the following:

- HPE BladeSystem c3000 Enclosure QuickSpecs:  
<https://www.hpe.com/h20195/v2/GetPDF.aspx/c04128340.pdf>  
**NOTE:** The c3000 HPE c-Class enclosures have full backwards and forwards compatibility, existing server blades are supported in the new enclosures and any future server blades will be supported in the existing enclosures.
- HPE BladeSystem c7000 Enclosure QuickSpecs:  
<https://www.hpe.com/h20195/v2/GetPDF.aspx/c04128339.pdf>

## Configuration Information - Factory Integrated Models

**NOTE:** The c7000 HPE c-Class enclosures have full backwards and forwards compatibility, existing server blades are supported in the new enclosures and any future server blades will be supported in the existing enclosures.

- HPE BladeSystem c-Class Interconnect and Mezzanine Components:  
<https://www.hpe.com/us/en/integrated-systems/bladesystem.html#portfolio> and  
<https://www.hpe.com/us/en/integrated-systems/bladesystem.html#portfolio>

**NOTE:** For optimal cooling and system performance the BL460c Gen9 Server Blade requires the c7000 enclosure to be configured with 10 fans and the c3000 enclosure to be configured with 6 fans.

## Additional Options

### HPE Networking

**NOTE:** A 10 Gigabit Ethernet adapter supports linking at 1Gbps or 10Gbps when connected to an interconnect module with 10Gb Ethernet downlinks.  
**NOTE:** A 10 Gigabit Ethernet adapter supports linking at only 1Gbps when connected to an interconnect module with 1Gb Ethernet downlinks.  
**NOTE:** The 10 Gigabit Ethernet adapters on each server blade connect to a 10Gb interconnect in bays 3-6 (HPE BladeSystem c7000 Enclosure) or bays 2-4 (HPE BladeSystem c3000 Enclosure).

#### 20 Gigabit Ethernet Mezzanine Cards

HPE FlexFabric 20Gb 2-port 630M Adapter 700076-B21

**NOTE:** Please see QuickSpecs for technical specifications and additional information at <https://www.hpe.com/h20195/v2/GetDocument.aspx?docname=c04312720>

HPE FlexFabric 20Gb 2-port 650M Adapter 700767-B21

**NOTE:** Please see QuickSpecs for technical specifications and additional information at <https://www.hpe.com/h20195/v2/GetDocument.aspx?docname=c04347342>

#### 10 Gigabit Ethernet Mezzanine Cards

HPE FlexFabric 10Gb 2-port 534M Adapter 700748-B21

**NOTE:** Please see QuickSpecs for technical specifications and additional information at: <https://www.hpe.com/us/en/product-catalog/servers/server-adapters.html>

HPE Ethernet 10Gb 2-port 560M Adapter 665246-B21

**NOTE:** Please see QuickSpecs for technical specifications and additional information at: <https://www.hpe.com/h20195/v2/GetPDF.aspx/c04111406.pdf>

#### 1 Gigabit Ethernet Mezzanine Cards

HPE Ethernet 1Gb 4-port 366M Adapter 615729-B21

**NOTE:** Please see QuickSpecs for technical specifications and additional information at: <https://www.hpe.com/h20195/v2/getpdf.aspx/c04111456.pdf?ver=10>

#### FlexibleLOM Adapters

**NOTE:** The server supports one (1) FlexibleLOM that is installed in the FlexibleLOM connectors and is already included in the pre-configured models. However, it must be added in Step 2 for Configure-to-Order Models. The FlexibleLOM options below are used to change these original FlexibleLOMs.

#### 20Gb FlexibleLOM Adapters

HPE FlexFabric 20Gb 2-port 630FLB Adapter 700065-B21

**NOTE:** Please see QuickSpecs for technical specifications and additional information at <https://www.hpe.com/h20195/v2/GetDocument.aspx?docname=c04312719>

HPE FlexFabric 20Gb 2-port 650FLB Adapter 700763-B21

**NOTE:** Please see QuickSpecs for technical specifications and additional information at <https://www.hpe.com/h20195/v2/GetDocument.aspx?docname=c04347341>

#### 10Gb FlexibleLOM Adapters

HPE FlexFabric 10Gb 2-port 536FLB Adapter 766490-B21

**NOTE:** Please see QuickSpecs for technical specifications and additional information at <https://www.hpe.com/h20195/v2/GetDocument.aspx?docname=c04347246>

HPE Ethernet 10Gb 2-port 560FLB Adapter 655639-B21

## Additional Options

**NOTE:** Please see QuickSpecs for technical specifications and additional information at <https://www.hpe.com/h20195/v2/GetPDF.aspx/c04111516.pdf>

### HPE InfiniBand Mezzanine Adapters

**NOTE:** When an InfiniBand adapter is installed in mezzanine slot 1, only one port is active (regardless of operating mode). When installed in mezzanine slot 2, both ports are active.

**NOTE:** InfiniBand QDR and FDR speeds are only supported on the HPE BladeSystem c7000 Enclosure. For additional information, please see the HPE BladeSystem c7000 Enclosure and InfiniBand QuickSpecs

at: <https://www.hpe.com/h20195/v2/GetPDF.aspx/c04128339.pdf>

<https://www.hpe.com/h20195/v2/getpdf.aspx/c04126044.pdf?ver=26>

HPE InfiniBand FDR/Ethernet 10Gb/40Gb 2-port 544+M Adapter

764283-B21

**NOTE:** The FDR InfiniBand adapter must be installed in mezzanine slot 1 for FDR mode and may be installed in either mezzanine slot if operated in any other mode.

HPE InfiniBand FDR 2-port 545M Adapter

702213-B21

### HPE Fibre Channel

HPE LPe1605 16Gb Fibre Channel HBA for BladeSystem c-Class

718203-B21

**NOTE:** Please see QuickSpecs for technical specifications and additional information at <https://www.hpe.com/h20195/v2/getpdf.aspx/c04315132.pdf?ver=2>

HPE QMH2672 16Gb Fibre Channel Host Bus Adapter

710608-B21

**NOTE:** Please see QuickSpecs for technical specifications and additional information at <https://www.hpe.com/h20195/v2/GetDocument.aspx?docname=c04126962>

HPE LPe1205A 8Gb Fibre Channel Host Bus Adapter for BladeSystem c-Class

659818-B21

**NOTE:** Please see QuickSpecs for technical specifications and additional information at <https://www.hpe.com/h20195/v2/GetDocument.aspx?docname=c04163733>

HPE QMH2572 8Gb Fibre Channel Host Bus Adapter for BladeSystem c-Class

651281-B21

**NOTE:** Please see QuickSpecs for technical specifications and additional information at <https://www.hpe.com/h20195/v2/GetDocument.aspx?docname=c04126040>

### HPE Processors

#### E5-2600 v4 series Processors

HPE BL460c Gen9 Intel Xeon E5-2690v4 (2.6GHz/14-core/35MB/135W) Processor Kit

819852-B21

HPE BL460c Gen9 Intel Xeon E5-2683v4 (2.1GHz/16-core/40MB/120W) Processor Kit

819851-B21

HPE BL460c Gen9 Intel Xeon E5-2680v4 (2.4GHz/14-core/35MB/120W) Processor Kit

819842-B21

HPE BL460c Gen9 Intel Xeon E5-2660v4 (2.0GHz/14-core/35MB/105W) Processor Kit

819841-B21

HPE BL460c Gen9 Intel Xeon E5-2650v4 (2.2GHz/12-core/30MB/105W) Processor Kit

819840-B21

HPE BL460c Gen9 Intel Xeon E5-2650Lv4 (1.7GHz/14-core/35MB/65W) Processor Kit

819849-B21

HPE BL460c Gen9 Intel Xeon E5-2640v4 (2.4GHz/10-core/25MB/90W) Processor Kit

819839-B21

HPE BL460c Gen9 Intel Xeon E5-2630v4 (2.2GHz/10-core/25MB/85W) Processor Kit

819845-B21

HPE BL460c Gen9 Intel Xeon E5-2623v4 (2.6GHz/4-core/10MB/85W) Processor Kit

819844-B21

HPE BL460c Gen9 Intel Xeon E5-2620v4 (2.1GHz/8-core/20MB/85W) Processor Kit

819838-B21

HPE BL460c Gen9 Intel Xeon E5-2699v4 (2.2GHz/22-core/55MB/145W) Processor Kit

819856-B21

HPE BL460c Gen9 Intel Xeon E5-2698v4 (2.2GHz/20-core/50MB/135W) Processor Kit

819855-B21

HPE BL460c Gen9 Intel Xeon E5-2697v4 (2.3GHz/18-core/45MB/145W) Processor Kit

819854-B21

HPE BL460c Gen9 Intel Xeon E5-2697Av4 (2.6GHz/16-core/40MB/145W) Processor Kit

819857-B21

HPE BL460c Gen9 Intel Xeon E5-2695v4 (2.1GHz/18-core/45MB/120W) Processor Kit

819853-B21

HPE BL460c Gen9 Intel Xeon E5-2667v4 (3.2GHz/8-core/25MB/135W) Processor Kit

819850-B21



## Additional Options

|                                                                              |            |
|------------------------------------------------------------------------------|------------|
| HPE BL460c Gen9 Intel Xeon E5-2643v4 (3.4GHz/6-core/20MB/135W) Processor Kit | 819848-B21 |
| HPE BL460c Gen9 Intel Xeon E5-2637v4 (3.5GHz/4-core/15MB/135W) Processor Kit | 819847-B21 |

**NOTE:** All processors within the server must be identical.

**NOTE:** DIMM slots 4 and 5 are not accessible when the E5-2699 v4, E5-2697 v4, E5-2697A v4, E5-2667 v4, E5-2643 v4, E5-2637 v4, E5-2699 v3, the E5-2697 v3, the E5-2643 v3, the E5-2637 v3, or the E5-2667 v3 is used. In a 2 processor configuration, there are twelve (12) total available DIMM slots.

**NOTE:** For the maximum supported memory speeds for each processor listed above, please reference the 'Memory Speed by Processor Model' table in the Memory section of the QuickSpecs.

**NOTE:** All processors support Intel® Hyper-Threading and Intel® Turbo Boost Technologies except the E5-2609 v4, E5-2603 v4, E5-2603 v3 and E5-2609 v3.

**NOTE:** DDR4 speed is the maximum memory speed of the processor. Actual memory speed may depend on the quantity and type of DIMMs installed.

**NOTE:** Supports 1 or 2 processors. Mixing different processor models is not supported.

**NOTE:** For the Intel® C610 Chipset E5-2600 v3 and v4 Series, the letter preceding the model number indicates the Product Line (E3, E5, E7); 2600x, 2 = number of CPUs in a Node, 6 is socket/segment designation, 00 = Processor SKU, and x = L for low power SKUs.

**NOTE:** The BL460c Gen9 includes two I/O mezzanine expansion slots. A processor must be installed in processor slot 1 for access to the first mezzanine expansion slot (expansion slot 1). A processor must be installed in processor slot 2 for access to the second mezzanine expansion slot (expansion slot 2).

**NOTE:** The letter "L" following the model number indicates denotes lower wattage.

### HPE Memory

**NOTE:** HPE memory from previous generation servers (DDR3) is not compatible with this server. HPE SmartMemory is required to realize the memory performance improvements and enhanced functionality listed in this document for Gen9. For additional information, please see the HPE SmartMemory QuickSpecs

at: <https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04111535>

**NOTE:** LRDIMM and RDIMM are distinct memory technologies and cannot be mixed within a server.

**NOTE:** Depending on the memory configuration and processor model, the memory speed may run at 2400MT/s, 2133MT/s, 1866MT/s, or 1600MT/s. Please see table at end of document or the Online Memory Configuration Tool

at: <https://h22195.www2.hpe.com/DDR4memoryconfig/Home/LEGAL>

#### HPE SmartMemory

##### Registered DIMMs (RDIMMs) - E5-2600 v4 series Processors

|                                                                               |            |
|-------------------------------------------------------------------------------|------------|
| HPE 8GB (1x8GB) Single Rank x8 DDR4-2400 CAS-17-17-17 Registered Memory Kit   | 805347-B21 |
| HPE 16GB (1x16GB) Single Rank x4 DDR4-2400 CAS-17-17-17 Registered Memory Kit | 805349-B21 |
| HPE 16GB (1x16GB) Dual Rank x4 DDR4-2400 CAS-17-17-17 Registered Memory Kit   | 836220-B21 |
| HPE 16GB (2x8GB) Dual Rank x8 DDR4-2400 CAS-17-17-17 Registered Memory Kit    | P00423-B21 |
| HPE 32GB (1x32GB) Dual Rank x4 DDR4-2400 CAS-17-17-17 Registered Memory Kit   | 805351-B21 |

##### Load Reduced DIMMs (LRDIMMs) - E5-2600 v4 series Processors

|                                                                                  |            |
|----------------------------------------------------------------------------------|------------|
| HPE 32GB (1x32GB) Dual Rank x4 DDR4-2400 CAS-17-17-17 Load Reduced Memory Kit    | 805353-B21 |
| HPE 64GB (1x64GB) Quad Rank x4 DDR4-2400 CAS-17-17-17 Load Reduced Memory Kit    | 805358-B21 |
| HPE 128GB (1x128GB) Octal Rank x4 DDR4-2400 CAS-20-18-18 Load Reduced Memory Kit | 809208-B21 |

## Additional Options

### HPE Drives

**NOTE:** The ProLiant BL460c Gen9 server includes the HPE hot-plug small form factor (SFF) SmartDrive carrier for enhanced management and reduced maintenance errors. HPE drives from generation G7 servers and before are not compatible with the BL460c Gen9 drive bays.

**NOTE:** The mixing of standard SAS drives with SAS SSD is supported within the server, but limits the RAID configuration to two separate RAID 0 volumes. Mixing of other drives types is not supported.

**NOTE:** HPE hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

**NOTE:** The hard drive options are not required when configuring a drive-less model.

#### HPE NVMe PCIe Read Intensive SFF (2.5-inch) Solid State Drives

|                                                                                               |            |
|-----------------------------------------------------------------------------------------------|------------|
| HPE 480GB NVMe x4 Lanes Read Intensive SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD  | 875587-B21 |
| HPE 960GB NVMe x4 Lanes Read Intensive SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD  | 875589-B21 |
| HPE 1.92TB NVMe x4 Lanes Read Intensive SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD | 875591-B21 |
| HPE 1TB NVMe x4 Lanes Read Intensive SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD    | 877984-B21 |
| HPE 2TB NVMe x4 Lanes Read Intensive SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD    | 877986-B21 |
| HPE 4TB NVMe x4 Lanes Read Intensive SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD    | 877988-B21 |

#### HPE NVMe PCIe Mixed Use SFF (2.5-inch) Solid State Drives

|                                                                                         |            |
|-----------------------------------------------------------------------------------------|------------|
| HPE 400GB NVMe x4 Lanes Mixed Use SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD | 875593-B21 |
| HPE 800GB NVMe x4 Lanes Mixed Use SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD | 875595-B21 |
| HPE 1.6TB NVMe x4 Lanes Mixed Use SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD | 875597-B21 |
| HPE 1.6TB NVMe x4 Lanes Mixed Use SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD | 877994-B21 |
| HPE 3.2TB NVMe x4 Lanes Mixed Use SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD | 877998-B21 |

#### HPE NVMe PCIe Write Intensive SFF (2.5-inch) SCN Drives

|                                                         |            |
|---------------------------------------------------------|------------|
| HPE 375GB NVMe x4 Lanes Write Intensive SFF (2.5in) SCN | 878014-B21 |
|---------------------------------------------------------|------------|

#### SATA Hot Plug SmartDrive SFF (2.5-inch) SSD Drives

|                                                                                        |            |
|----------------------------------------------------------------------------------------|------------|
| HPE 240GB SATA Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD     | P04556-B21 |
| HPE 480GB SATA Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD     | P04560-B21 |
| HPE 960GB SATA Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD     | P04564-B21 |
| HPE 1.92TB SATA Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD    | P04566-B21 |
| HPE 3.84TB SATA Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD    | P04570-B21 |
| HPE 240GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD  | 877740-B21 |
| HPE 480GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD  | 877746-B21 |
| HPE 960GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD  | 877752-B21 |
| HPE 1.92TB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | 877758-B21 |

## Additional Options

|                                                                                        |            |
|----------------------------------------------------------------------------------------|------------|
| HPE 3.84TB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | 877764-B21 |
| HPE 480GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD       | 877776-B21 |
| HPE 960GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD       | 877782-B21 |
| HPE 1.92TB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD      | 877788-B21 |
| HPE 240GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD       | 880295-B21 |
| HPE 3.84TB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD      | P00896-B21 |

### SAS Hot Plug with SmartDrive SFF (2.5-inch) Enterprise Drives

|                                                                                            |            |
|--------------------------------------------------------------------------------------------|------------|
| HPE 300GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD      | 870753-B21 |
| HPE 600GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD      | 870757-B21 |
| HPE 900GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD      | 870759-B21 |
| HPE 900GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty 512e Digitally Signed Firmware HDD | 870765-B21 |
| HPE 1TB SAS 12G Midline 7.2K SFF (2.5in) SC 1yr Wty 512e Digitally Signed Firmware HDD     | 765464-B21 |
| HPE 1TB SAS 7.2K SFF SC 3yr Wty Digitally Signed Firmware HDD                              | 832514-B21 |
| HPE 2TB SAS 12G Midline 7.2K SFF (2.5in) SC 1yr Wty 512e HDD                               | 765466-B21 |
| HPE 2.4TB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty 512e Digitally Signed Firmware HDD | 881457-B21 |

### SATA (SFF 2.5-inch) Hard Drives

|                                                                                        |            |
|----------------------------------------------------------------------------------------|------------|
| HPE 1TB SATA 6G Midline 7.2K SFF (2.5in) SC 1yr Wty Digitally Signed Firmware HDD      | 655710-B21 |
| HPE 2TB SATA 6G Midline 7.2K SFF (2.5in) SC 1yr Wty 512e Digitally Signed Firmware HDD | 765455-B21 |

### 12G SAS Write Intensive SFF (2.5-inch) SC DS SSD

|                                                                                        |            |
|----------------------------------------------------------------------------------------|------------|
| HPE 400GB SAS 12G Write Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | 873351-B21 |
| HPE 800GB SAS 12G Write Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | 873355-B21 |
| HPE 400GB SAS 12G Write Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | 873357-B21 |

### 12G SAS Read Intensive SFF (2.5-inch) SC SSD

|                                                                                        |            |
|----------------------------------------------------------------------------------------|------------|
| HPE 3.84TB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | 875330-B21 |
| HPE 1.92TB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | 875326-B21 |
| HPE 7.68TB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | 870144-B21 |
| HPE 960GB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD  | 875313-B21 |
| HPE 480GB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD  | 875311-B21 |
| HPE 960GB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD  | 872390-B21 |
| HPE 1.92TB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | 872392-B21 |
| HPE 3.84TB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | 872394-B21 |
| HPE 15.3TB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | 870148-B21 |

### 12G SAS Mixed Use SFF (2.5-inch) SC SSD

|                                                                                  |            |
|----------------------------------------------------------------------------------|------------|
| HPE 400GB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | 873359-B21 |
| HPE 800GB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | 873363-B21 |
| HPE 1.6TB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | 873365-B21 |
| HPE 3.2TB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | 873367-B21 |
| HPE 400GB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | 872374-B21 |

## Additional Options

|                                                                                  |            |
|----------------------------------------------------------------------------------|------------|
| HPE 800GB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | 872376-B21 |
| HPE 1.6TB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | 872382-B21 |
| HPE 3.2TB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | 872386-B21 |

### 6G SAS Mixed Use SFF (2.5-inch) SC Solid State Drive

|                                                                                   |            |
|-----------------------------------------------------------------------------------|------------|
| HPE 1.92TB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | 875478-B21 |
| HPE 960GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD  | 875474-B21 |
| HPE 480GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD  | 875470-B21 |
| HPE 240GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD  | 875483-B21 |

### 12G SAS SFF (2.5-inch) SC 3yr Wty H2 Drive

|                                                                                            |            |
|--------------------------------------------------------------------------------------------|------------|
| HPE 1.8TB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty 512e Digitally Signed Firmware HDD | 872481-B21 |
| HPE 1.2TB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD      | 872479-B21 |
| HPE 600GB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD      | 872477-B21 |
| HPE 300GB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD      | 872475-B21 |

### 12G SATA 2.5in RI-3 SFF SC SSD

|                                                                                        |            |
|----------------------------------------------------------------------------------------|------------|
| HPE 3.84TB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | P00896-B21 |
| HPE 1.92TB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | 875513-B21 |
| HPE 960GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD  | 875511-B21 |
| HPE 480GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD  | 875509-B21 |
| HPE 240GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD  | 875503-B21 |

**NOTE:** The mixing of standard SAS drives with SAS SSD is supported within the server, but limits the RAID configuration to two separate RAID 0 volumes. Mixing of other drives types is not supported

## HPE iLO Advanced License HPE Integrated Lights-Out (iLO) Advanced for ProLiant BladeSystem Remote Management

|                                                                                               |            |
|-----------------------------------------------------------------------------------------------|------------|
| HPE iLO Advanced for BladeSystem Electronic License with 3yr Support on iLO Licensed Features | E6U63ABE   |
| HPE iLO Advanced for BladeSystem 1-server License with 3yr Support on iLO Licensed Features   | BD502A     |
| HPE iLO Advanced for BladeSystem Electronic License with 1yr Support on iLO Licensed Features | E6U60ABE   |
| HPE iLO Advanced for BladeSystem 1-server License with 1yr Support on iLO Licensed Features   | 512488-B21 |

**NOTE:** Customer will receive a license entitlement certificate, which must be redeemed online or via fax in order to obtain the license activation key(s). Includes one or three years of 24 x 7 HPE Software Technical Support Service.

**NOTE:** For additional license kits, including electronic delivery options, please see the iLO QuickSpecs at <https://www.hpe.com/us/en/servers/integrated-lights-out-ilo.html>

**NOTE:** Customer will receive a license entitlement certificate, which must be redeemed online or via fax in order to obtain the license activation key(s). Includes one or three year of 24 x 7 HPE Software Technical Support Service.

**NOTE:** For additional license kits, please see the QuickSpecs at:

<https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04154343>

## Additional Options

### HPE OneView Software for Converged Mgmt

#### HPE OneView

#### HPE OneView with iLO Advanced

|                                                                        |          |
|------------------------------------------------------------------------|----------|
| HPE OneView including 3yr 24x7 Support Physical 1-server LTU           | E5Y34A   |
| HPE OneView including 3yr 24x7 Support Flexible Quantity E-LTU         | E5Y35AAE |
| HPE OneView Physical Media Kit LTU                                     | E5Y37A   |
| HPE OneView w/o iLO including 3yr 24x7 Support 1-server LTU            | P8B24A   |
| HPE OneView w/o iLO including 3yr 24x7 Support Flexible Quantity E-LTU | P8B26AAE |

**NOTE:** For additional license kits please see the QuickSpecs at <https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04154343>

### High Performance Clusters

#### HPE Cluster Management Utility

|                                                              |        |
|--------------------------------------------------------------|--------|
| HPE Insight Cluster Management Utility 1yr 24x7 Flexible LTU | QL803B |
| HPE Insight Cluster Management Utility 3yr 24x7 Flexible LTU | BD476A |

**NOTE:** These part numbers can be used to purchase one certificate for multiple licenses and support with a single activation key. Each license is for one node (server). Customer will receive a printed end user license agreement and license entitlement certificate via physical shipment. The license entitlement certificate must be redeemed online in order to obtain a license key. Customer also will receive a support agreement.

|                                              |        |
|----------------------------------------------|--------|
| HPE Insight Cluster Management Utility Media | BD477A |
|----------------------------------------------|--------|

**NOTE:** For additional license kits please see the QuickSpecs at <https://www.hpe.com/h20195/v2/GetDocument.aspx?docname=c04111735>

### HPE Security

|                                     |            |
|-------------------------------------|------------|
| HPE Trusted Platform Module Option  | 488069-B21 |
| HPE Trusted Platform Module 2.0 Kit | 745823-B21 |

**NOTE:** The TPM (Trusted Platform Module) is a microcontroller chip that can securely store artifacts used to authenticate the server platform. These artifacts can include passwords, certificates and encryption keys. Windows® BitLocker™ Drive Encryption (BitLocker) is a data protection feature available in Windows Server® 2008 R2 and 2012. BitLocker leverages the enhanced security capabilities of a Trusted Platform Module (TPM) version 1.2. The TPM works with BitLocker to help protect user data and to ensure that a server running Windows Server 2008 R2 and 2012 has not been tampered with while the system was offline.

**NOTE:** For more information about TPM, including a white paper, go to <https://www.hpe.com/h20195/v2/getpdf.aspx/4AA5-4782ENW.pdf>

**NOTE:** ProLiant OS pre-installed units will come with the partition required for TPM deployment.

**NOTE:** The TPM key is unique to every TPM deployed server and must be retained. Misplacing or losing the key could result in data loss.

### HPE Storage Controllers

|                                                                 |            |
|-----------------------------------------------------------------|------------|
| HPE Smart Array P244br/1GB FBWC 12Gb 2-ports Int SAS Controller | 749680-B21 |
| HPE H244br 12Gb 2-ports Int Smart Host Bus Adapter              | 726809-B21 |
| HPE Smart Array P246br/1GB FBWC 12Gb 4-ports Int SAS Controller | 726793-B21 |

### HPE Secure Encryption

|                                          |          |
|------------------------------------------|----------|
| HP Secure Encryption per Svr Entitlement | C9A82AAE |
|------------------------------------------|----------|

**NOTE:** HPE Secure Encryption is supported on the HPE Smart Array P244br and H244br (running in RAID mode) as an option. HPE Secure Encryption licensing is based on the number of physical drives requiring encryption.

## Additional Options

**NOTE:** For more information about HPE Secure Encryption, go to <https://www.hpe.com/us/en/product-catalog/detail/pip.6532260.html>

### HPE InfiniBand Mezzanine Adapters

**NOTE:** When an InfiniBand adapter is installed in mezzanine slot 1, only one port is active (regardless of operating mode). When installed in any other mezzanine slot, both ports are active.

**NOTE:** InfiniBand QDR and FDR speeds are only supported on the HPE BladeSystem c7000 Enclosure. For additional information, please see the HPE BladeSystem c7000 Enclosure and InfiniBand QuickSpecs at:

<https://www.hpe.com/h20195/v2/GetPDF.aspx/c04128339.pdf>

<https://www.hpe.com/h20195/v2/getpdf.aspx/c04126044.pdf?ver=26>

HPE InfiniBand FDR/Ethernet 10Gb/40Gb 2-port 544+M Adapter

764283-B21

**NOTE:** The FDR InfiniBand adapter must be installed in mezzanine slot 1 for FDR mode and may be installed in any mezzanine slot if operated in any other mode.

HPE InfiniBand FDR 2-port 545M Adapter

702213-B21

### HPE Flash Media Kits for USB Drives

#### HPE Flash Media Kits for USB Drives

#### HPE Enterprise Mainstream Flash Media Kits for Memory Cards

HPE 8GB microSD Flash USB Drive

737953-B21

HPE 8GB microSD Flash Memory Card

726116-B21

HPE 32GB microSD Flash Memory Card

700139-B21

HPE 8GB Dual microSD Flash USB Drive

741279-B21

### HPE Care Pack Services

#### Proactive Care Services

HPE 3 year Proactive Care 24x7 BL4xxc Gen9 Service

U7BN8E

HPE 3 year Proactive Care 24x7 with DMR BL4xxc Gen9 Service

U7BN9E

HPE 3 year Proactive Care Advanced 24x7 BL4xxc Gen9 Service

U7BT6E

HPE 3 year Proactive Care Advanced 24x7 with DMR BL4xxc Gen9 Service

U7CF8E

#### Installation Services

HPE Install c-Class Server Blade Service

UE493E

## Memory

For detailed memory configuration rules and guidelines, please use the Online DDR4 Memory Configuration Tool:

<https://h22195.www2.hpe.com/DDR4memoryconfig/Home/LEGAL>

### Memory Subsystem Architecture

Each Intel® Xeon® E5-2600 v3 family or Intel® Xeon® E5-2600 v3 family processor socket contains four memory channels that support two DIMMs each for a total of eight (8) DIMM per installed processor or a grand total of sixteen (16) DIMMs for the server. Up to 64GB capacity DIMMs are supported for 1TB of memory (16 DIMM slots x 64GB per DIMM).

### Memory Population Rules and Guidelines:

- A minimum of one DIMM is required per processor.
- Install DIMMs only if the corresponding processor is installed.
- If only one processor is installed in a two processor system, only half of the DIMM slots are available.
- DIMM sizes can be mixed in channel. To maximize performance, it is recommended to balance the total memory capacity between all installed processors and to load the channels similarly whenever possible.
- LRDIMM and RDIMMs are all distinct memory technologies and cannot be mixed within a server. The majority of ProLiant Gen9 servers support RDIMM and LRDIMM.
- DIMMs of different speeds may be mixed in any order; the server will select a common optimal speed.
- The maximum memory speed is a function of the memory type, memory configuration, and processor model.
- The maximum memory capacity is a function of the memory type and number of installed processors.
- HPE memory from previous generation servers is not compatible with the BL460c Gen9 Server Blade.
- To realize the performance memory capabilities listed in this document, HPE SmartMemory is required. For additional information, please see the HPE SmartMemory QuickSpecs


at: <https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04111535>

### Supported Memory Bandwidth on Intel® Xeon® E5-2600 v4 series Processors

| DIMM Rank                                                                                         | Register DIMM (RDIMM) |                  |                  |                  | Load Reduced (LRDIMM) |                  |                  |
|---------------------------------------------------------------------------------------------------|-----------------------|------------------|------------------|------------------|-----------------------|------------------|------------------|
|                                                                                                   | Single Rank (1R)      |                  | Dual Rank (2R)   |                  | Dual Rank (2R)        | Quad Rank (4R)   | Octal Rank (8R)  |
| DIMM Capacity                                                                                     | 8GB                   | 16GB             | 16GB             | 32GB             | 32GB                  | 64GB             | 128GB            |
| Voltage                                                                                           | Std Voltage 1.2V      | Std Voltage 1.2V | Std Voltage 1.2V | Std Voltage 1.2V | Std Voltage 1.2V      | Std Voltage 1.2V | Std Voltage 1.2V |
| <b>SLOTS THAT CAN BE POPULATED</b>                                                                |                       |                  |                  |                  |                       |                  |                  |
| 16 slot servers                                                                                   | 16                    | 16               | 16               | 16               | 16                    | 16               |                  |
| <b>MAXIMUM CAPACITY (GB)*</b>                                                                     |                       |                  |                  |                  |                       |                  |                  |
| 16 slot servers                                                                                   | 128                   | 256              | 256              | 512              | 512                   | 1024             |                  |
| <b>POPULATED DIMM SPEED (MT/s)</b>                                                                |                       |                  |                  |                  |                       |                  |                  |
| 1 DIMM Per Channel                                                                                | 2400                  | 2400             | 2400             | 2400             | 2400                  | 2400             |                  |
| 2 DIMM Per Channel                                                                                | 2133                  | 2133             | 2133             | 2133             | 2400                  | 2400             |                  |
| <b>NOTE: Maximum Capacity will vary based on individual serve platform qualification schedule</b> |                       |                  |                  |                  |                       |                  |                  |

Memory

Memory options part number decoder

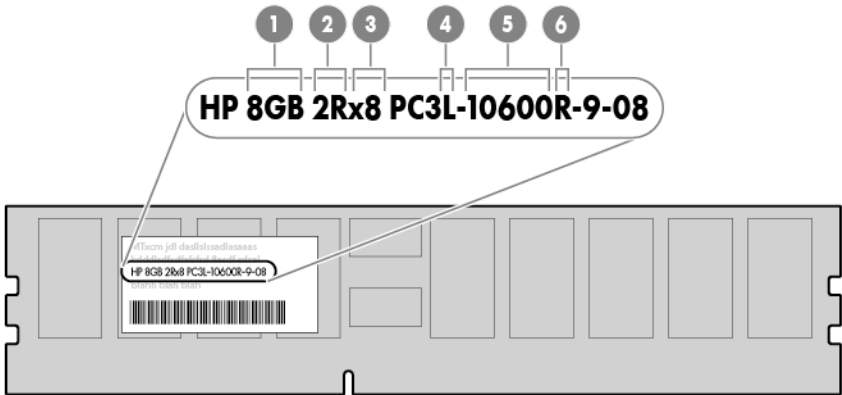

| Item | Description       | Definition                                           |
|------|-------------------|------------------------------------------------------|
| 1    | Capacity          | 8 GByte<br>16 GByte<br>32 GByte                      |
| 2    | Rank              | 1R = Single-rank<br>2R = Dual-rank<br>4R = Quad-rank |
| 3    | Data width        | x4 = 4-bit<br>x8 = 8-bit                             |
| 4    | Memory generation | DDR4                                                 |
| 5    | Max. Memory speed | 2133MT/s                                             |
| 6    | CasLatency        | P = 15                                               |
| 6    | DIMM type         | R = RDIMM (registered)<br>L = LRDIMM (load reduced)  |

Following are memory options available from Hewlett Packard Enterprise:

HPE Memory

**NOTE:** HPE memory from previous generation servers (DDR3) is not compatible with this server. HPE SmartMemory is required to realize the memory performance improvements and enhanced functionality listed in this document for Gen9. For additional information, please see the HPE SmartMemory QuickSpecs at:

<https://www.hpe.com/us/en/servers/memory.html>

**NOTE:** LRDIMM and RDIMM are distinct memory technologies and cannot be mixed within a server.

**NOTE:** Depending on the memory configuration and processor model, the memory speed may run at 2400MT/s, 2133MT/s, 1866MT/s, or 1600MT/s.

Registered DIMMs (RDIMMs) - E5-2600 v4 series Processors

|                                                                               |            |
|-------------------------------------------------------------------------------|------------|
| HPE 8GB (1x8GB) Single Rank x8 DDR4-2400 CAS-17-17-17 Registered Memory Kit   | 805347-B21 |
| HPE 16GB (1x16GB) Single Rank x4 DDR4-2400 CAS-17-17-17 Registered Memory Kit | 805349-B21 |
| HPE 16GB (1x16GB) Dual Rank x4 DDR4-2400 CAS-17-17-17 Registered Memory Kit   | 836220-B21 |
| HPE 32GB (1x32GB) Dual Rank x4 DDR4-2400 CAS-17-17-17 Registered Memory Kit   | 805351-B21 |




Memory

**Load Reduced DIMMs (LRDIMMs) - E5-2600 v4 series Processors**

|                                                                                  |            |
|----------------------------------------------------------------------------------|------------|
| HPE 32GB (1x32GB) Dual Rank x4 DDR4-2400 CAS-17-17-17 Load Reduced Memory Kit    | 805353-B21 |
| HPE 128GB (1x128GB) Octal Rank x4 DDR4-2400 CAS-20-18-18 Load Reduced Memory Kit | 809208-B21 |

Storage

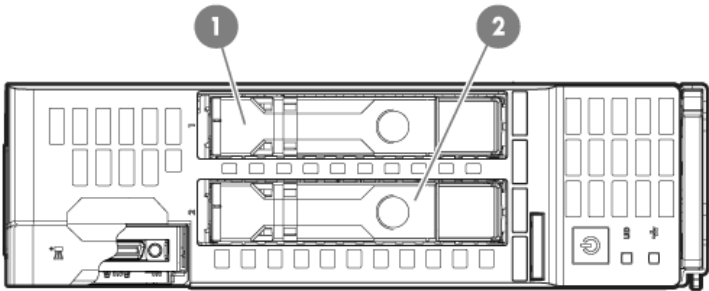

1-2      2 x SFF hot-plug SAS, SATA, SAS SDD, and SATA SSD hard drives

## Technical Specifications

|                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                              |
|---------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------|
| System Unit                           | Dimensions<br>(H x W x D)<br>(with bezel)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 7.11 x 2.18 x 20.37 in (18.07 x 5.54 x 51.76 cm)                                                                                                                                                                                                                                                                                                                                                                                     |                                              |
|                                       | Weight<br>(approximate)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Maximum: all processors, 16 DIMMs, hard drives, mezzanine cards, and two flash cache batteries installed<br><br>Minimum: one processor and 2 DIMMs installed                                                                                                                                                                                                                                                                         | 14.00 lb (6.33 kg)<br><br>10.50 lb (4.75 kg) |
| Power Specifications                  | For power specifications including input requirements, BTU rating, and power supply output, please see the: <ul style="list-style-type: none"><li>HPE BladeSystem c3000 Enclosure QuickSpecs at <a href="https://www.hpe.com/h20195/v2/GetDocument.aspx?docname=c04123379">https://www.hpe.com/h20195/v2/GetDocument.aspx?docname=c04123379</a></li><li>HPE BladeSystem c7000 Enclosure QuickSpecs at <a href="https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04128339">https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04128339</a></li></ul> <p>To review typical system power ratings use the HPE Power Advisor which is available via the online tool located at <a href="https://paonline56.itcs.hpe.com">https://paonline56.itcs.hpe.com</a>.</p> <p><b>NOTE:</b> For optimal cooling and system performance the BL460c Gen9 Server Blade requires the c7000 enclosure to be configured with 10 fans and the c3000 enclosure to be configured with 6 fans.</p> |                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                              |
| System Inlet Temperature              | Operating                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 305 m (1.8°F per every 1,000 ft) above sea level to a maximum of 3,050 m (10,000 ft), no direct sustained sunlight.<br><br>Maximum rate of change is 10°C/hr (18°F/hr). The upper limit may be limited by the type and number of options installed.<br><br>System performance may be reduced if operating with a fan fault or above 30°C (86°F). |                                              |
|                                       | Non-operating                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | -30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/hr (36°F/hr).                                                                                                                                                                                                                                                                                                                                                           |                                              |
| Extended Ambient Operating Support    | For Approved hardware configurations, the supported system inlet range is extended to be:<br>5° to 10°C (41° to 50°F) and 35° to 40°C (95° to 104°F) at sea level with an altitude derating of 1.0°C per every 175 m (1.8°F per every 574 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft)<br><b>NOTE:</b> Qualifications for extended ambient configurations are detailed at: <a href="http://www.hpe.com/servers/ashrae">http://www.hpe.com/servers/ashrae</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                              |
| Relative Humidity<br>(non-condensing) | Operating                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 10 to 90% relative humidity (Rh), 28°C (82.4°F) maximum wet bulb temperature, non-condensing.                                                                                                                                                                                                                                                                                                                                        |                                              |
|                                       | Non-operating                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non-condensing.                                                                                                                                                                                                                                                                                                                                      |                                              |

## Technical Specifications

|                                                 |                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                                                                                 |
|-------------------------------------------------|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                 | <b>Altitude</b>                 | Operating                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 3,050 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1,500 ft/min). |
|                                                 |                                 | Non-operating                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 9,144 m (30,000 ft). Maximum allowable altitude change rate is 457 m/min (1,500 ft/min).                                                                        |
|                                                 | <b>Acoustic Noise</b>           | For acoustic noise specifications, please see the HPE BladeSystem c-Class Enclosures QuickSpecs located at: <ul style="list-style-type: none"> <li>HPE BladeSystem c3000 Enclosure QuickSpecs: <a href="https://www.hpe.com/h20195/v2/GetPDF.aspx/c04128340.pdf">https://www.hpe.com/h20195/v2/GetPDF.aspx/c04128340.pdf</a></li> <li>HPE BladeSystem c7000 Enclosure QuickSpecs: <a href="https://www.hpe.com/h20195/v2/GetPDF.aspx/c04128339.pdf">https://www.hpe.com/h20195/v2/GetPDF.aspx/c04128339.pdf</a></li> </ul> |                                                                                                                                                                 |
| <b>HPE Smart Array P244br Controller</b>        | <b>Disk Drive Interface</b>     | 12Gb/s SAS (Serial Attached SCSI)<br>6Gb/s SATA (Serial ATA)                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                 |
|                                                 | <b>Server Interface</b>         | x8 PCIe 3.0 provides 8GB/s maximum bandwidth                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                 |
|                                                 | <b>Cache Memory</b>             | 1GB flash backed write cache (FBWC) cache standard                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                                                                                 |
|                                                 | <b>Logical Drives Supported</b> | 64 (with included 1GB cache)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                 |
|                                                 | <b>Host Memory Addressing</b>   | 64-bit, supporting servers memory space greater than 4GB                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                 |
|                                                 | <b>RAID Support</b>             | RAID 1 (mirroring), RAID 0 (striping), RAID 10                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                                 |
|                                                 | <b>Other</b>                    | Upgradeable firmware with recovery ROM<br>Online drive flash (with SAS drives)                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                                 |
| <b>HPE Smart HBA H244br Controller</b>          | <b>Disk Drive Interface</b>     | 12Gb/s SAS (Serial Attached SCSI)<br>6Gb/s SATA (Serial ATA)                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                 |
|                                                 | <b>Server Interface</b>         | x8 PCIe 3.0 provides 8GB/s maximum bandwidth                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                 |
|                                                 | <b>Cache Memory</b>             | None                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                 |
|                                                 | <b>Logical Drives Supported</b> | 64                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                                                                                 |
|                                                 | <b>Host Memory Addressing</b>   | 64-bit, supporting servers memory space greater than 4GB                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                 |
|                                                 | <b>RAID Support</b>             | RAID 1 (mirroring) and RAID 0 (striping)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                 |
|                                                 | <b>Other</b>                    | Upgradeable firmware with recovery ROM<br>Online drive flash (with SAS drives)                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                                 |
| <b>HPE Dynamic Smart Array B140i Controller</b> | <b>Disk Drive Interface</b>     | 6Gb/s SATA (Serial ATA)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                                                                                 |
|                                                 | <b>Server Interface</b>         | Embedded x4 PCIe 2.0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                 |
|                                                 | <b>SAS Connectors</b>           | 2 internal SATA ports                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                 |
|                                                 | <b>Cache Memory</b>             | None                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                 |
|                                                 | <b>SAS Speed</b>                | 6Gb/s SATA links                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                                                                 |
|                                                 | <b>Logical Drives Supported</b> | Up to 10 logical volumes (2 physical drives)                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                 |

## Technical Specifications

|                                                      |                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|------------------------------------------------------|-------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                      | <b>Host Memory Addressing</b> | 64-bit, supporting greater than 4GB server memory space                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|                                                      | <b>Hot Plug Support</b>       | Yes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|                                                      | <b>RAID Support</b>           | RAID 1 (Mirroring)<br>RAID 0 (Striping)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|                                                      | <b>Other</b>                  | Upgradeable firmware with recovery ROM                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>HPE FlexFabric 10Gb 2-port 536FLB FlexibleLOM</b> | <b>Type</b>                   | Integrated dual-port KR 10Gb FlexibleLOM with FlexFabric (Flex-10, FCoE, hardware-based iSCSI, iSCSI boot, TCP/IP offload engine, and autosensing 1Gb/10Gb Ethernet capability)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|                                                      | <b>Network Processor</b>      | QLogic 57840S with integrated MAC/PHY                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|                                                      | <b>Data Transfer Method</b>   | x8 PCI Express 3.0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|                                                      | <b>Network Transfer Rate</b>  | Two ports, each at 20Gbps full duplex; 40Gbps aggregate full duplex theoretical bandwidth<br><b>NOTE:</b> Each port is autosensing 1Gb/10Gb, and can interoperate with 1Gb or 10Gb HPE BladeSystem c-Class interconnect components. Both ports will operate at the same speed.<br><b>NOTE:</b> Each port on the 536FLB adapter transmits from the server at 20Gbps (theoretical) full duplex.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|                                                      | <b>IEEE Compliance</b>        | 802.1p, 802.1q, 802.1qau, 802.3ad, 802.3ae, 802.3ap (10GBase-KX4) and 802.3x                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|                                                      | <b>Standard Features</b>      | Full hardware offload of iSCSI and FCoE storage protocol processing for highest performance<br>converged Ethernet data and storage networks.<br>Dual-port 10GbE Flex-10 FlexibleLOM network adapter that provides the flexibility to choose the type of LOM to meet growing infrastructure needs<br>Industry-leading throughput and latency performance<br>Supports the HPE Flex-10 blade interconnect technology<br>User configurable bandwidth settings when combined with the 10Gb Flex-10 Virtual Connect module. From 100Mb/s to 10Gb/s on up to four "Physical Function" NICs per port, in increments of 100Mb/s for NIC. The combined bandwidth of NICs cannot exceed port bandwidth i.e. 10 Gb.<br>Up to 40Gb/s bi-directional near line rate throughput<br>Hardware acceleration and offloads for stateless TCP/IP, TCP Offload Engine (TOE)<br>Improved small packet performance<br>Support for Preboot eXecution Environment (PXE)<br>Integrated PHY and MAC<br>Supports for SR-IOV<br>Support for Network Partitioning (NPAR) |
| <b>HPE FlexFabric 20Gb 2-port 650FLB FlexibleLOM</b> | <b>Type</b>                   | Integrated dual-port KR2 20Gb FlexibleLOM with FlexFabric (Flex-20, FCoE, RoCE, Tunnel Offload with VXLAN/NVGRE, hardware-based iSCSI, iSCSI boot, TCP/IP offload engine, and autosensing Ethernet speed capability)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|                                                      | <b>Network Processor</b>      | Emulex XE-104                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|                                                      | <b>Data Transfer Method</b>   | x8 PCI Express 3.0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |

## Technical Specifications

|                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Network Transfer Rate</b> | Two ports, each at 40 Gbps bi-directional; 80 Gbps aggregate bi-directional theoretical bandwidth                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>IEEE Compliance</b>       | 802.3ae, 802.1Q, 802.3x, 802.1p, 802.3ad/LACP, 802.1AB(LLDP), 802.1Qbg, 802.1Qbb, 802.1Qaz, 802.3ap                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Standard Features</b>     | <p>Dual 20Gb ports provide up to 80Gb bi-directional per adapter</p> <p>Multi-speed adapter operates at either 20GbE or 10GbE</p> <p>Converges FCoE or RoCE with LAN traffic on a single Ethernet wire</p> <p>Tunnel Offload support for VXLAN and NVGRE</p> <p>RDMA over Converged Ethernet (RoCE) for greater server efficiency and lower latency (6125XLG only)</p> <p>Advanced storage offload processing freeing up valuable CPU cycles</p> <p>Supports UEFI and legacy boot options</p> <p>Mixed Storage – supports NIC + FCoE on one port, and NIC + iSCSI on the other</p> <p>Concurrent Storage – concurrently supports NIC, FCoE, and iSCSI storage functions on the same port (NIC + FCoE + iSCSI)</p> <p>Industry-leading throughput and latency performance</p> <p>Supports the HPE Flex-20 blade interconnect technology</p> <p>Over eight million small packets/s, ideal for web/mobile applications, mobile messaging, and social media</p> <p>User configurable bandwidth settings when combined with the 20Gb Flex-20 Virtual Connect module. From 100Mb/s to 10Gb/s on up to four "Physical Function" NICs per port, in increments of 100Mb/s for NIC. The combined bandwidth of NICs cannot exceed port bandwidth i.e. 20 Gb/s.</p> <p>Greater bandwidth with PCIe 3.0</p> <p>Jumbo Frames support</p> <p>Supports Wake On LAN (WOL)</p> <p>Support for Preboot eXecution Environment (PXE)</p> <p>Support for Microsoft Windows SMB Direct</p> <p>Optimized host virtualization density with SR-IOV support</p> |

### Environment-friendly Products and Approach

### End-of-life Management and Recycling

Hewlett Packard Enterprise offers end-of-life Hewlett Packard Enterprise product return, trade-in, and recycling programs in many geographic areas. For trade-in information, please go to: <http://www.hpe.com/info/recycle>. To recycle your product, please go to: <http://www.hpe.com/info/recycle> or contact your nearest Hewlett Packard Enterprise sales office. Products returned to Hewlett Packard Enterprise will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard Enterprise web site at: <http://www.hpe.com/info/recycle>. These instructions may be used by recyclers and other WEEE treatment facilities as well as Hewlett Packard Enterprise OEM customers who integrate and re-sell Hewlett Packard Enterprise equipment.

## Summary of Changes

| Date        | Version History | Action  | Description of Change                                                                                                                                                                                                                                                                                                                                                                      |
|-------------|-----------------|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 04-Jun-2018 | Version 30      | Changed | Overview, Standard Features, Configuration Information-Factory Integrated Models, Additional Options, Memory, and Technical Specifications sections were updated.                                                                                                                                                                                                                          |
|             |                 | Added   | SKUs added:<br>P00423-B21, 809208-B21, 700065-B21, 700763-B21, 766490-B21, 655639-B21, 878014-B21, P04556-B21, P04560-B21, P04564-B21, P04566-B21, P04570-B21, P00896-B21, 873351-B21, 873355-B21, 873357-B21.                                                                                                                                                                             |
|             |                 | Removed | SKUs were deleted:<br>819846-L21, 819837-L21, 819843-L21, 700066-B21, 700764-B21, 766491-B21, 684214-B21, 825555-B21, 819846-B21, 819837-B21, 819843-B21, 880875-B21, 880877-B21, C6N27A, 805358-B21.                                                                                                                                                                                      |
| 02-Apr-2018 | Version 29      | Changed | Standard Features, Models, Configuration Information - Factory Integrated Models, and Additional Options sections                                                                                                                                                                                                                                                                          |
|             |                 | Removed | Obsolete SKUs were deleted:<br>727021-B21, 871770-B21, 871768-B21, 872363-B21, 748387-B21, 791034-B21, 652605-B21, 751518-B21, 785069-B21, 781516-B21, 785067-B21, 804631-B21, 832414-B21, 869386-B21, 869384-B21, 869378-B21, 804587-B21, 869376-B21, 869374-B21, 759208-B21, 759210-B21, 759212-B21, 870763-B21, 726720-B21, 759934-B21, 764282-B21.                                     |
| 06-Nov-2017 | Version 28      | Added   | SKU was added in Core Options section:<br>651281-B21.                                                                                                                                                                                                                                                                                                                                      |
|             |                 | Removed | Obsolete SKUs were deleted:<br>764908-B21, 764906-B21, 764904-B21, 765044-B21, 765038-B21, 765036-B21, 765034-B21, 764892-B21, 736939-B21, 736936-B21, 872855-B21, 872853-B21, 802578-B21, 802586-B21, 816576-B21, 802891-B21, 822567-B21, 822563-B21, 822555-B21, 764927-B21, 804605-B21, 804593-B21, 804575-B21, 779176-B21, 779164-B21, 779168-B21, 779172-B21, 762261-B21, 794603-B21. |
| 23-Oct-2017 | Version 27      | Changed | Care Pack naming and Service and Support- Parts and Materials updated.                                                                                                                                                                                                                                                                                                                     |
| 25-Sep-2017 | Version 26      | Changed | QuickSpecs was updated.                                                                                                                                                                                                                                                                                                                                                                    |
| 07-Aug-2017 | Version 25      | Added   | SKUs added:<br>875470-B21, 875474-B21, 875478-B21, 875483-B21, 870144-B21, 875311-B21, 875313-B21, 875326-B21, 875330-B21, 875503-B21, 875509-B21, 875511-B21, 875513-B21.                                                                                                                                                                                                                 |
|             |                 | Removed | Obsolete SKUs were removed:<br>846430-B21, 846432-B21, 846436-B21, 794605-B21, 775588-B21, 792278-B21, 846495-B21, 846497-B21, 875503-B21, 846434-B21, C6N31A.                                                                                                                                                                                                                             |
| 12-Jun-2017 | Version 24      | Added   | New SKUs added in Core Options section:<br>875593-B21, 875595-B21, 875597-B21, 875587-B21, 875589-B21, 875591-B21.                                                                                                                                                                                                                                                                         |
|             |                 | Removed | Obsolete SKUs were deleted:<br>C6N28ABE, C6N36ABE, 652572-B21, 652749-B21, 804599-B21, 804581-B21, 816929-B21, 838404-B21, 838406-B21, 838408-B21, 838410-B21, 838412-B21, 785233-B21, 802582-B21, 804677-B21, 804671-B21, 804665-B21, 804639-B21, 804625-B21, 804613-B21, 762263-B21.                                                                                                     |
| 27-Mar-2017 | Version 23      | Changed | Overview, Core Options, and Additional Options sections were updated.                                                                                                                                                                                                                                                                                                                      |
|             |                 | Removed | Obsolete SKUs were deleted:<br>718162-B21, 652589-B21, 652583-B21, 652564-B21, 652611-B21,                                                                                                                                                                                                                                                                                                 |

## Summary of Changes

|             |            |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|-------------|------------|---------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|             |            |         | 652564-B21, 652611-B21, 764923-B21, 764925-B21, 764929-B21, 817011-B21, 816995-B21, 816985-B21, 816909-B21.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 13-Feb-2017 | Version 22 | Added   | SKUs added:<br>872355-B21, 872359-B21, 872363-B21, 870753-B21, 870757-B21, 870759-B21, 870763-B21, 870765-B21, 872475-B21, 872477-B21, 872479-B21, 872481-B21, 872344-B21, 872348-B21, 872352-B21, 869374-B21, 869376-B21, 869378-B21, 869384-B21, 869386-B21.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|             |            | Changed | Memory section was corrected.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|             |            | Removed | Obsolete SKUs were deleted:<br>854845-B21                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| 28-Nov-2016 | Version 21 | Added   | SKUs added:<br>868814-B21, 868818-B21, 868822-B21, 868826-B21, 868830-B21, 871768-B21, 871770-B21, 872853-B21, 872855-B21                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|             |            | Removed | Turn Off Skus deleted:<br>816879-B21, 816889-B21, 816899-B21, 816919-B21, 816965-B21, 822559-B21, 816975-B21.<br>Obsolete SKUs were deleted:<br>655708-B21, 652745-B21, 717965-B21, 757339-B21, 717973-B21, 739898-B21, 717971-B21, 691868-B21, 691866-B21, 691862-B21, 789145-B21.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| 16-Sep-2016 | Version 20 | Changed | QuickSpecs information was updated.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|             |            | Added   | Obsolete SKUs were deleted:<br>651281-B21, 734360-B21, 739888-B21, 717969-B21, 756636-B21, BD883A, 854845-B21.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| 06-Jun-2016 | Version 19 | Changed | Models, Configuration Information - Factory Integrated Models, Core Options, Memory, and Technical Specifications sections were updated.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|             |            | Added   | SKUs added in Related Options and Core Options sections:<br>854845-B21, 809208-B21, 822559-B21, 846436-B21                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| 31-Mar-2016 | Version 18 | Changed | Overview, Standard Features, Optional Features, Recommended Support Services for BL460, Models, Configuration Information - Factory Integrated, Core Options, Additional Options, and Memory sections were updated.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|             |            | Added   | SKUs added to QuickSpecs:<br>813198-B21, 819852-L21, 819851-L21, 819842-L21, 819841-L21, 819840-L21, 819849-L21, 819839-L21, 819845-L21, 819846-L21, 819844-L21, 819838-L21, 819837-L21, 819856-L21, 819855-L21, 819854-L21, 819857-L21, 819853-L21, 819850-L21, 819848-L21, 819847-L21, 805347-B21, 805349-B21, 836220-B21, 805351-B21, 805353-B21, 805358-B21, 825555-B21, 819852-B21, 819851-B21, 819842-B21, 819841-B21, 819840-B21, 819849-B21, 819839-B21, 819845-B21, 819846-B21, 819844-B21, 819838-B21, 819837-B21, 819843-B21, 819856-B21, 819855-B21, 819854-B21, 819857-B21, 819853-B21, 819850-B21, 819848-B21, 819847-B21, 764908-B21, 764906-B21, 764904-B21, 765044-B21, 765038-B21, 765036-B21, 765034-B21, 764892-B21, 736939-B21, 736936-B21, 802891-B21, 846430-B21, 846432-B21, 846434-B21, 846436-B21, 816879-B21, 838404-B21, 838406-B21, 838408-B21, 838410-B21, 838412-B21. |
|             |            | Removed | Obsolete SKUs were deleted:<br>756601-B21, 691864-B21                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| 16-Feb-2016 | Version 17 | Changed | Information updated in different sections.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|             |            | Added   | SKUs Added in Core Options sections:<br>846495-B21, 846497-B21, 832514-B21.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|             |            | Removed | Obsolete SKUs were deleted:<br>789135-B21, E5Y38A, E5Y39AAE, QK763A, QK762A, QK761A, D8585AAE, D8584A.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| 09-Oct-2015 | Version 16 | Changed | Core Options section was updated.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |



## Summary of Changes

|             |            |         |                                                                                                                                                                                                                                                                                                               |
|-------------|------------|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|             |            | Added   | SKUs added:<br>P8B24A, P8B26AAE, P8B31A                                                                                                                                                                                                                                                                       |
|             |            | Removed | Obsolete SKUs were deleted:<br>756621-B21, 756657-B21, 789155-B21                                                                                                                                                                                                                                             |
| 28-Sep-2015 | Version 15 | Added   | SKU added in Additional Options:<br>745823-B21                                                                                                                                                                                                                                                                |
| 28-Aug-2015 | Version 14 | Changed | Information in Core Options section was updated.                                                                                                                                                                                                                                                              |
|             |            | Added   | SKUs added in Core Options section:<br>659818-B21, 651281-B21                                                                                                                                                                                                                                                 |
| 17-Aug-2015 | Version 13 | Changed | Standard Features, Optional Features, Configuration Information - Factory Integrated Models, Core Options and Memory sections were updated.                                                                                                                                                                   |
|             |            | Added   | SKUs added in Additional Options and Core Options sections:<br>C9A82AAE, 804677-B21, 804671-B21, 804665-B21, 804639-B21,<br>804631-B21, 804625-B21, 832414-B21, 804613-B21, 804605-B21,<br>804599-B21, 804593-B21, 804587-B21, 804581-B21, 804575-B21.                                                        |
|             |            | Removed | Obsolete SKU deleted:<br>F6Q89AAE                                                                                                                                                                                                                                                                             |
| 19-Jun-2015 | Version 12 | Changed | Information updated.                                                                                                                                                                                                                                                                                          |
| 1-Jun-2015  | Version 11 | Changed | Information in Optional Features, Configuration Information- Factory Integrated, and Models sections was updated.                                                                                                                                                                                             |
|             |            | Added   | SKUs added:<br>726724-B21, 748387-B21, 791034-B21, 726793-B21                                                                                                                                                                                                                                                 |
|             |            | Removed | SKUs removed:<br>726793-B21, 741159-B21, 741151-B21                                                                                                                                                                                                                                                           |
| 6-Apr-2015  | Version 10 | Changed | Industry Standard Compliance and Additional Options sections were updated                                                                                                                                                                                                                                     |
| 30-Mar-2015 | Version 9  | Added   | SKUs Added:<br>741279-B21, 728629-B21, 726793-B21, 749975-B21, 726782-B21,<br>727261-B21, 802578-B21, 802582-B21, 802586-B21, 802891-B21,<br>781516-B21, 785067-B21, 765453-B21, 765455-B21, 765464-B21,<br>765466-B21, 789135-B21, 789145-B21, 789155-B21, 794603-B21,<br>794605-B21, 781518-B21, 785069-B21 |
|             |            | Removed | Obsolete SKUs Deleted:<br>741146-B21, 741138-B21                                                                                                                                                                                                                                                              |
| 27-Feb-2015 | Version 8  | Changed | Smart Buy 779805-S01 processor was updated in Product Bulleting US version.                                                                                                                                                                                                                                   |
| 9-Feb-2015  | Version 7  | Changed | Core Options and Additional Options sections were updated                                                                                                                                                                                                                                                     |
|             |            | Added   | SKUs Added on Hard Drives section:<br>779164-B21, 779168-B21, 779172-B21, 779176-B21, 764923-B21,<br>764925-B21, 764927-B21, 764929-B21                                                                                                                                                                       |
|             |            | Removed | SKUs removed:<br>728935-B21, 718939-B21                                                                                                                                                                                                                                                                       |
| 12-Dec-2014 | Version 6  | Changed | Descriptions were updated throughout the QuickSpecs.                                                                                                                                                                                                                                                          |
|             |            | Added   | SKU Added on HPE Smart Memory: 792278-B21                                                                                                                                                                                                                                                                     |
| 1-Dec-2014  | Version 5  | Changed | Overview, Standard Features, Configuration Information - Factory Integrated Models and Core Options sections were updated                                                                                                                                                                                     |
|             |            | Added   | SKUs added:<br>759934-B21, 726720-B21, 775588-B21, 785233-B21, 757339-B21,<br>756657-B21, 756621-B21                                                                                                                                                                                                          |
|             |            | Removed | SKU E5Y35AAE deleted due to compatibility issues                                                                                                                                                                                                                                                              |
| 10-Oct-2014 | Version 4  | Changed | Smart Buy section added to the NA version only                                                                                                                                                                                                                                                                |
| 8-Oct-2014  | Version 3  | Changed | Network Controller, Enclosures and Compatible SAN sections were updated                                                                                                                                                                                                                                       |
|             |            | Added   | HPE I/O Accelerator Options section has been added including following SKUs:<br>QK763A, QK762A, QK761A                                                                                                                                                                                                        |
|             |            | Removed | Expansion Blade Support section was deleted                                                                                                                                                                                                                                                                   |

Summary of Changes

|             |           |         |                                                                                                          |
|-------------|-----------|---------|----------------------------------------------------------------------------------------------------------|
| 17-Sep-2014 | Version 2 | Changed | Changes made throughout the Standard Features, Models, SmartMemory, Core Options and Carepacks sections. |
| 09-Sep-2014 | Version 1 | Created | New QuickSpecs                                                                                           |



hp.com/qref/bl460cgen9



Sign up for updates



© Copyright 2018 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

Microsoft and Windows NT are US registered trademarks of Microsoft Corporation. Intel, the Intel logo, Xeon and Xeon Inside are trademarks of Intel Corporation in the U.S. and other countries.

For hard drives, 1GB = 1 billion bytes. Actual formatted capacity is less.

c04380273 - 15052 – North America - V30 - 4-June-2018